

Drawer runners for wooden drawers

- ▶ KA 5632 full extension runner for side installation
- ▶ Load capacity 45 kg




- ▶ Precision full extension runner with pull-out stop and roll-out prevention
- ▶ A release lever makes the drawer easy to remove and reinstall
- ▶ Precision control for moving smoothly and freely and high lateral stability
- ▶ For drawers with grooved, rebated or loosely fitted drawer bottom panel
- ▶ Load capacity to EN 15338, Level 1
- ▶ Galvanised steel, blue passivated

KA 5632 ball bearing runner, 12.7 mm installed width

Nominal length / drawer length NL mm	Minimum carcass depth KT mm	Hole spacing b1 mm	Hole spacing b2 mm	Hole spacing b3 mm	Hole spacing b4 mm	Hole spacing b5 mm	Hole spacing C mm	Order no.	PU
250	254						192	1 071 891	10 pair
300	304	96					242	1 071 893	10 pair
350	354	96					292	1 071 894	10 pair
400	404	96	96				342	1 071 895	10 pair
450	454	96	128				392	1 071 896	10 pair
500	504	96	128	64			442	1 071 897	10 pair
550	554	96	128	64	32	32	492	1 071 898	10 pair
600	604	96	128	96	32	32	542	1 071 899	10 pair
650	654	96	128	160	32	32	592	1 071 900	10 pair

Planning dimensions

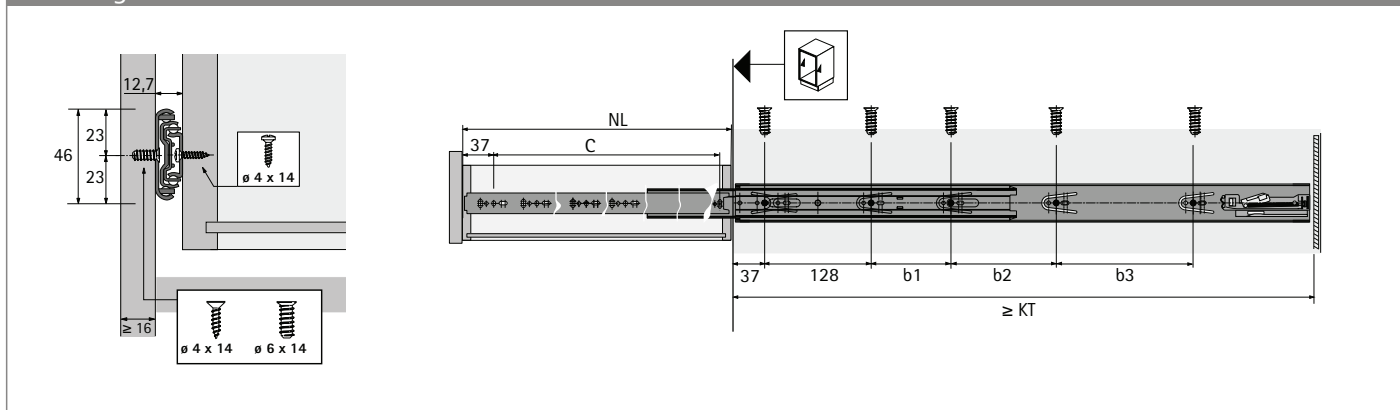

Advice

- ▶ For technical information, see page 39
- ▶ For accessories, see page 46 - 48