

Refrigerant Hoses With Safe Seal Fitting:

To order hoses with the Safe Seal Fitting, add the suffix "-SS" to any model number.

600/3000psi

Model No.	Pressure Rating	Hose Length	Hose Fitting
23333-SS	600/3000psi	3'	Low & High Side 1/4" Regular Fitting+1/4" Safe Seal Fitting Service Hose 1/4" Regular Fitting+1/4" Swivel Fitting
23335-SS		5'	
23336-SS		6'	

800/4000psi

Model No.	Pressure Rating	Hose Length	Hose Fitting
23433-SS	800/4000psi	3'	Low & High Side 1/4" Regular Fitting+5/16" Safe Seal Fitting Service Hose 1/4" Regular Fitting+1/4" Swivel Fitting
23435-SS		5'	
23436-SS		6'	
23533-SS		3'	Low & High Side 5/16" Regular Fitting+5/16" Safe Seal Fitting Service Hose 5/16" Regular Fitting+1/4" Swivel Fitting
23535-SS		5'	
23536-SS		6'	

Refrigerant Hoses With Swivel Fitting:

To order hoses with the Swivel Fitting, add the suffix "-T" to any model number.

600/3000psi

Model No.	Pressure Rating	Hose Length	Hose Fitting
23333-T	600/3000psi	3'	Low & High Side 1/4" Regular Fitting+1/4" Swivel Fitting Service Hose 1/4" Regular Fitting+1/4" Swivel Fitting
23335-T		5'	
23336-T		6'	

800/4000psi

Model No.	Pressure Rating	Hose Length	Hose Fitting
23433-T	800/4000psi	3'	Low & High Side 1/4" Regular Fitting+5/16" Swivel Fitting Service Hose 1/4" Regular Fitting+1/4" Swivel Fitting
23435-T		5'	
23436-T		6'	
23533-T		3'	Low & High Side 5/16" Regular Fitting+5/16" Swivel Fitting Service Hose 5/16" Regular Fitting+1/4" Swivel Fitting
23535-T		5'	
23536-T		6'	



Safe Seal Fitting for Refrigerant Hoses



Distributed by: Stareast International Pty. Ltd.

45 BRYANT ST, PADSTOW NSW 2211

Office Number: 02 9792 5988 (international number +61 2 9792 5988) Fax

Number: 02 9792 5944 (international number +61 2 9792 5944) Opening Hours

Sales Counter:

7:45am - 5pm Monday-Friday & 8:30am - 1pm Saturday

Email: sales@stareast.com.au



SCAN FOR VIDEO




PRODUCT DESCRIPTION

Our new patented Safe Seal Fitting contains many features that allow a technician to quickly and safely connect refrigerant hoses to the system service ports.

The One-Touch design prevents refrigerants from spraying out during hose connection and disconnection, protecting the technician from injury.

The Swivel Sleeve ensures that the fitting will not come loose, even if the hose is moved or tugged on. With these features, the Safe Seal Fitting is an efficient, environmentally friendly, and easy to use product that technicians can take advantage of.

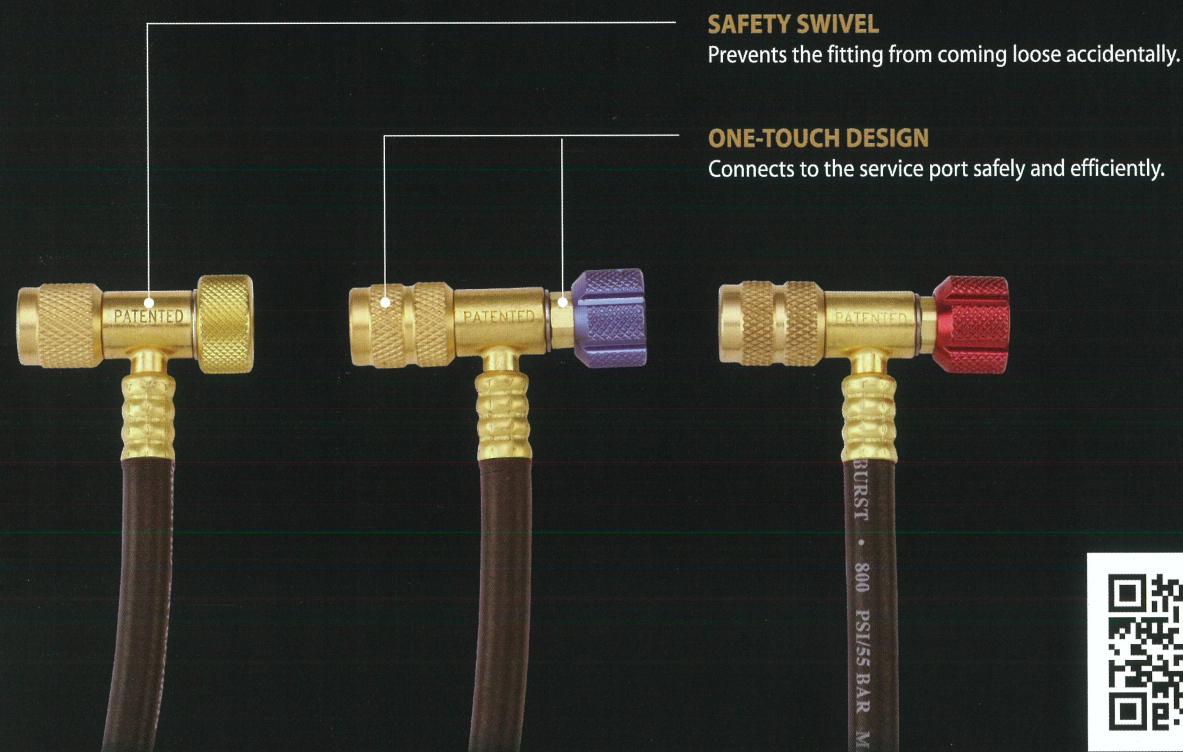

SAFETY SWIVEL

Prevents the fitting from coming loose accidentally.

ONE-TOUCH DESIGN

Connects to the service port safely and efficiently.



SCAN FOR YOUTUBE VIDEO

SAFETY SWIVEL

The Swivel Sleeve on the fitting allows the hose to rotate around freely. Moving the hose will not cause the fitting to come loose, preventing accidental leaks.



ONE TOUCH DESIGN


The One-Touch design tightens the fitting onto the service port before allowing refrigerant to flow out from the system.

At first, turning the knob tightens the fitting onto the service port.

Once the fitting is fully secured, turning the same knob now moves the internal core depressor forward, opening the service port valve and activating refrigerant flow.


Connects to the service port safely and efficiently.

1

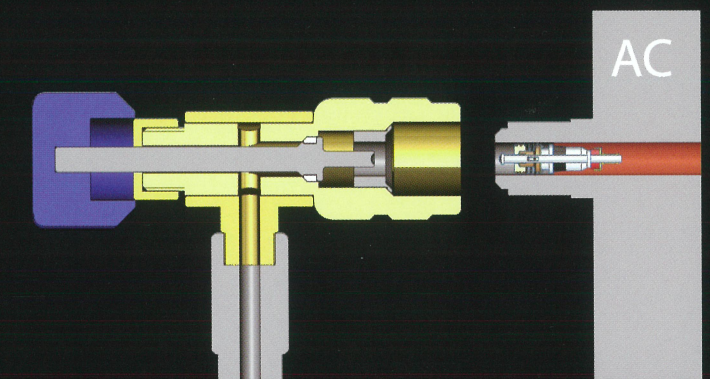

The fitting is screwed onto the service port.

2

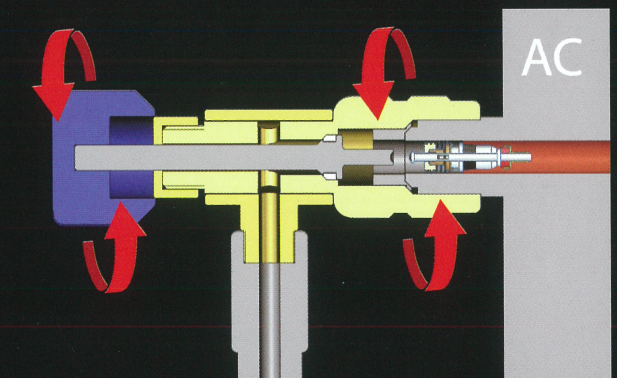

Internal pin activates refrigerant flow.

3

