

Esprit Anti-Corrosion Fixed Camera

2 MP

The Esprit Anti-Corrosion Fixed is a stainless steel fixed camera with exceptional resistance to corrosion, designed to guarantee efficient video security in offshore/onshore marine environments and in ports and roadways. With 40x zoom and full 1080p resolution, the Esprit Anti-Corrosion Fixed camera offers exceptional image quality while tracking objects in motion and in variable lighting conditions thanks to wide dynamic range and low light compensation. In addition, the Esprit Anti-Corrosion Fixed camera offers AISI 316L construction, with IP66/IP67/IP68/IP69 certifications, NEMA Type 4X and 6P ratings and Lloyd's Register Type Approval, among other environmental certifications, that ensure sites are protected even in wet and treacherous conditions.



Features



Rugged Construction

AISI 316L stainless steel offers maximum corrosion resistance.



Wide Dynamic Range & Low Light Compensation

Offers excellent image detail in contrasting light and shadows.



Lloyd's Register Marine Type Approval

Obtained Lloyd's Register Marine Type Approval for the maritime and shipping sector.



Railway compliance

Complies with the standard for railway applications.



Weather Resistant

Rated NEMA Type 4X/6P and IP66/67/68/69 for water, corrosion and dust resistance.



High-Temperature Range

Optimized to operate reliably even at increased temperature variances: from -40°C (-40°F) up to +65°C (+149°F).



ONVIF® Compliant

ONVIF Profile G, M, S and T compliance allows for easy integration with existing ONVIF infrastructures. Integrates with Pelco VideoXpert and other leading video management systems.



Peace of Mind

3-year limited warranty. 5-year extended warranty is available.

ONVIF is a trademark of Onvif, Inc.

Specifications

Image Performance 2 mp		
Image Sensor		1/2.8" progressive scan CMOS, 2 MP
Active Pixels (H x V)		1937 (H) × 1097 (V) = 2.2M Pixels
Imaging Area (H x V)		5.568 mm (H) × 3.132 mm (V); 0.219 " (H) × 0.123 " (V)
Minimum Illumination		0.03 lux (F/1.6) in color mode; 0.02 lux (F/1.6) in monochrome
Dynamic Range		120 dB
Image Rate		Up to 60 fps
Aspect Ratio (Resolution Scaling)		Down to (16:9) 384×216 or (5:4) 320×256
3D Noise Reduction Filter		Yes
Lens		
Lens		4.25 to 170 mm, F/1.6 - F/4.95, autofocus
Angle of View	Horizontal	66.35° - 1.9°
	Vertical	39.99° - 1.11°
Zoom		Up to 40x
Image Control		
Video Compression		H.264 and H.265 Pelco Smart Compression, Motion JPEG
Streaming		Multi-stream H.264, Multi-stream H.265, Motion JPEG
Motion Detection		Pixel motion: Selectable sensitivity and threshold. Classified object detection
Electronic Shutter Control		Automatic, Manual (1/1 to 1/10,000 sec)
Iris Control		Automatic, Open, Closed
Day/Night Control		Automatic, Manual
Flicker Control		60 Hz, 50 Hz
White Balance		Automatic, Manual
Backlight Compensation		On/Off
Privacy Zones		3D, up to 64 zones
Presets		500 named presets
Tours		No
Electronic Image Stabilization		Yes
Digital Defog		Adjustable/Off
Network		
Network		100 BASE-TX
Cabling Type		CAT5e/CAT6 shielded (STP) Ethernet cable is required to fully comply with EMC regulatory standards
Connector		RJ-45
ONVIF		ONVIF compliance Profile G, Profile M, Profile S, and Profile T (www.onvif.org)
Security		Password protection, HTTPS encryption, digest authentication, WS authentication, user access log, 802.1x port based authentication. Signed and encrypted firmware.
Protocols		IPv6, IPv4, HTTP, HTTPS, SOAP, DNS, NTP, RTSP, RTCP, RTP, TCP, UDP, IGMPv3, ICMP, DHCP, Zeroconf, ARP, HSTS, QoS, DSCP
Streaming Protocols		RTP/UDP, RTP/UDP multicast, RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/RTSP/HTTPS/TCP, HTTP, SRTP
Device Management Protocols		SNMP v2c, SNMP v3

Peripherals		
Audio Input/Output		None
External I/O Terminals		2 Digital Output (optional)
Onboard Storage		Pre-installed 128 GBytes storage
Mechanical		
Camera Weight (fastening support included)		5.1 kg; 11.2 lb
Extra Clear Glass Window		3 mm thick (0.12")
Polycarbonate Window (optional)		3 mm thick (0.12")
Construction		AISI 316L stainless steel
Mounting configuration		Wall, Parapet and Ceiling mount
Electrical		
Power Consumption		21W
Power Source/Current Consumption	External Power	24 VAC, 1.32A, 50/60 Hz 24 VDC, 0.9A
	PoE	PoE+ (IEEE 802.3 at)
Power/Signal Connector		26 AWG to 18 AWG
RTC Battery Backup		None
Environmental		
Operating Temperature		From -40°C (-40°F) up to +65°C (149°F) Temperature test complies with NEMA-TS 2-2003 (R2008) par. 2.1.5.1, test profile fig. 2-1 (from -34°C (-29.2°F) to +74°C (165.2°F))
Storage Temperature		-40 °C to +70 °C (-40 °F to 158 °F)
Humidity		5% - 95% non-condensing
Housing Climate Control		Built-in heater and fan
Cold Start		Up to 60 minute startup delay at temperature lower than -10 °C (14 °F)
Certifications		
Certifications/Directives		UL, cUL, CE, UKCA, ROHS, LR, RCM, KC, BIS
Safety		UL 62368-1, CSA 62368-1, IEC/EN 62368-1, IS13252(PART 1):2010/IEC60950-1:2005
Environmental and Performance		UL/CSA/IEC 60950-22, IEC 60529 IP66, IP67, IP68, IP69 Weather Rating, IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-30, IEC 60068-2-14, NEMA TS 2 para 2.2.7 - 2.2.9, Type 4X and 6P, MIL-STD-810-H
Electromagnetic Emissions		FCC Part 15 Subpart B Class A, IC ICES-003 Class A, EN 55032 Class A, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 50121-4
Electromagnetic Immunity		EN 55035, EN 50121-4 only for 24 VDC/VAC
Warranty		3-year limited warranty. 5-year extended warranty is available.
Railway Applications		Compliance to railway application standard: EN50121-4 (only with 24 VAC or 24 VDC power supply)
Marine Applications		Lloyd's Register Marine Type Approval: Test Specification Number 1 (ENV1, ENV2, ENV3, ENV5) Electromagnetic compatibility: EN60945 Environmental: EN60068-2-52, IEC 60068-2-78 Tested at 70°C (158°F) for 16 hours in compliance with EN60068-2-2

Analytics Specifications

Supported Analytics Events*	
Objects in Area	The event is triggered when the selected object type moves into the region of interest.
Object Loitering	The event is triggered when the selected object type moves into the region of interest, then stays for an extended amount of time.
Objects Crossing Beam	The event is triggered when the specified number of objects have crossed the directional beam that is configured over the camera's field of view. The beam can be unidirectional or bidirectional.
Object Appears or Enters Area	The event is triggered by each object that enters the region of interest and can also be used to count objects.
Object Not Present in Area	The event is triggered when no objects are present in the region of interest.
Objects Enter Area	The event is triggered when the specified number of objects have entered the region of interest.
Objects Leave Area	The event is triggered when the specified number of objects have left the region of interest.
Object Stops in Area	The event is triggered when an object moves into a region of interest and then stops moving for the specified threshold time.
Direction Violated	The event is triggered when an object moves in the prohibited direction of travel.
Sabotage Detection	The event is triggered when the scene unexpectedly changes.

*Pelco Smart Analytics powered by Motorola Solutions.

Pelco Elevate Supported Features	
Image Health	Detects incremental changes in the cameras view, such as position shifts or obstructions. Notifies users through ONVIF conformant events and summarized email reports.


Outline Dimensions

Esprit Anticorrosion Enhanced 2MPX40 Fixed


(Esprit Anti-Corrosion Enhanced 1 Series, 2MP 40x Zoom, Fixed Bullet, 24V/poe+)

[X.X]	INCHES
X	MM


Wall Mount

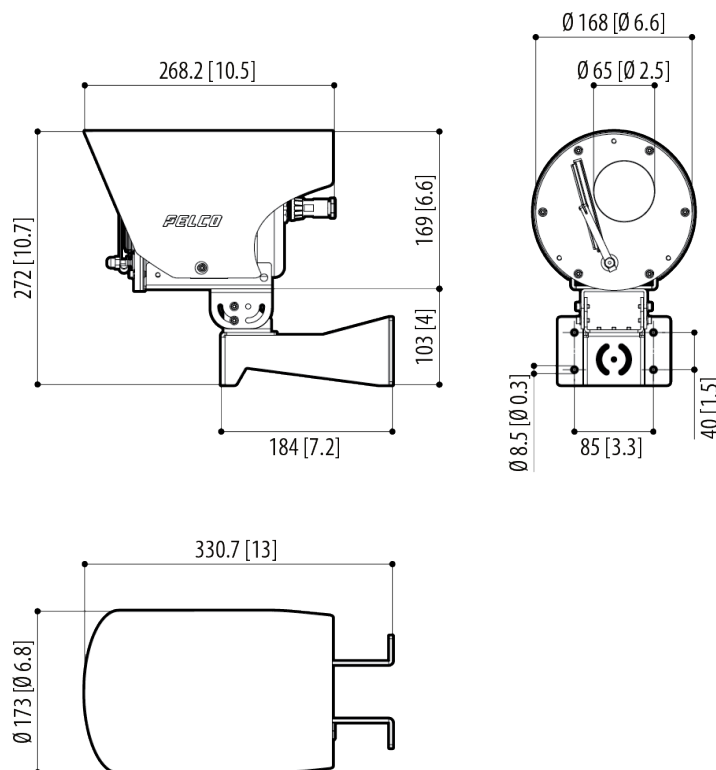

Parapet Mount

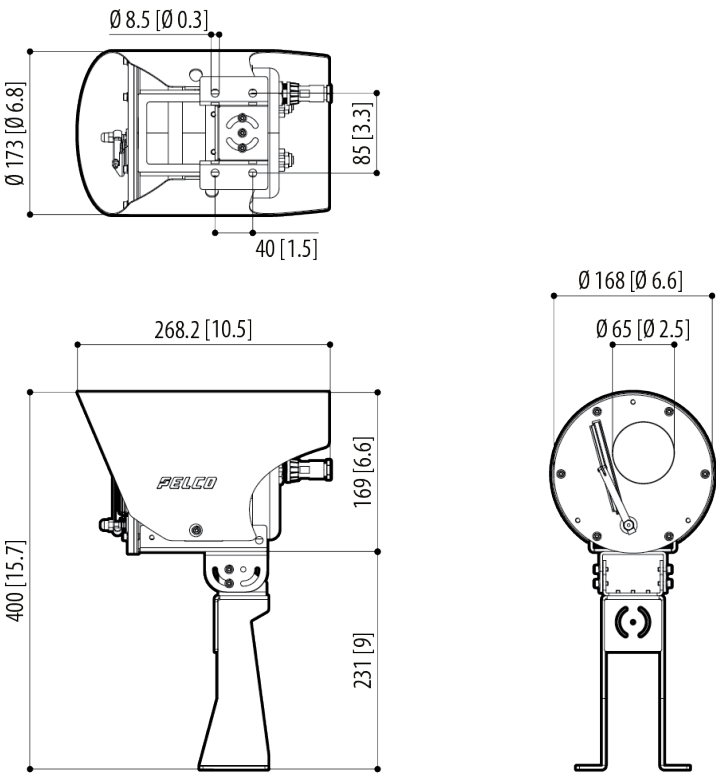

Ceiling Mount

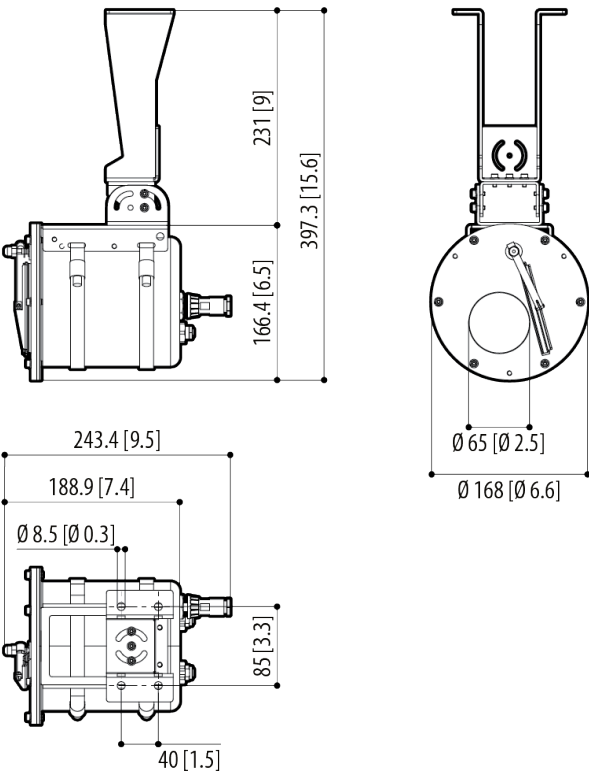

Ordering Information

ESPRIT ANTI-CORROSION FIXED CAMERA

Display Part Number	Extra Clear Glass Window	Polycarbonate Window	Wiper	2 Digital Outputs
ESSE1-2X40-SBT-PAP		✓		
ESSE1-2X40-SBT-PA	✓			
ESSE1-2X40-SBT-PAW	✓		✓	✓

ESPRIT ANTI-CORROSION FIXED ACCESSORIES

Accessory	Description
UEAP	Pole adaptor, stainless steel AISI 316L
UEAC	Corner adaptor, SS AISI 316L
UEAW	Counter-plate, stainless steel AISI 316L
WASPT0V5L5M00	Washer 5l, 5m, 230VAC-24VAC-120VAC
WASPT0V23L11M00	Washer 23l, 11m, 230Vac-24VAC-120VAC
WASPT1V23L30M00	Washer 23l, 30m, water float, 230VAC
WASPT3V23L30M00	Washer 23l, 30m, water float, 120VAC
COMB100A	Comm. box, w PS & Switch, 220-230VAC
COMB200A	Comm. box, w PS & Switch, 24VAC
COMB300A	Comm. box, w PS & Switch, 120-127VAC
WASNX1V10L20M00	Tank 10l (2.6gal) with integrated manual pump, controlled by solenoid valve, IN 230 Vac, delivery head up to 30m (98ft), with 20m (66ft) antistatic water delivery pipe
WASNX2V10L20M00	Tank 10l (2.6gal) with integrated manual pump, controlled by solenoid valve, IN 24 Vac, delivery head up to 30m (98ft), with 20m (66ft) antistatic water delivery pipe
WASNX3V10L20M00	Tank 10l (2.6gal) with integrated manual pump, controlled by solenoid valve, IN 120 Vac, delivery head up to 30m (98ft), with 20m (66ft) antistatic water delivery pipe

Support

Learn more and find additional documentation at pelco.com or email support@pelco.com for specific product support.



Jun 2024 | | Rev 3

© 2024, Motorola Solutions, Inc. All rights reserved. MOTOROLA, MOTO, MOTOROLA SOLUTIONS, and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. Pelco, the Pelco logo, and other trademarks associated with Pelco products referred to in this publication are trademarks of Pelco, Inc. or its affiliates. All other product names and services are the property of their respective companies. Product specifications and availability are subject to change without notice.