




Shielded Power Inductors – SER1360

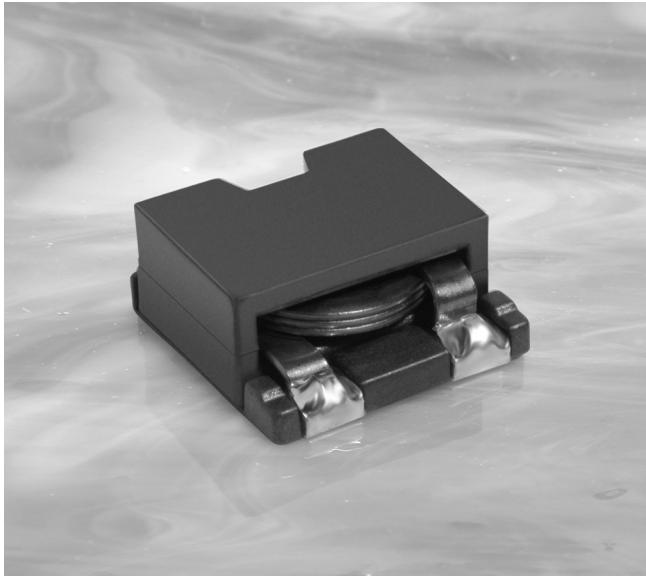

The SER1360 series provides exceptionally high current carrying capability (up to 43 Amps) and very low DC resistance, all in a low profile, small footprint package.

The part's magnetic shielding and 13×13 mm base allow high density mounting while the flat wire winding keeps the overall height to just 6 mm.

In addition to the standard values show, custom values are available to meet specific applications.

Part number ¹	Inductance ² ±10% (μ H)	DCR (mOhm) ³ typ max	SRF typ ⁴ (MHz)	Isat (A) ⁵			Irms (A) ⁶	
				10% drop	20% drop	30% drop	20°C rise	40°C rise
SER1360-331KL_	0.33	0.77	0.85	200	36	41	43	13.0
SER1360-651KL_	0.65	0.77	0.85	160	23	27	28	13.0
SER1360-102KL_	1.0	2.36	2.60	75	32	33	33.5	9.5
SER1360-182KL_	1.8	2.36	2.60	50	17	19	20	9.5
SER1360-272KL_	2.7	2.36	2.60	42	12	13	14	9.5
SER1360-402KL_	4.0	5.50	6.05	34	11	12	13	7.1
SER1360-472KL_	4.7	5.50	6.05	32	9.5	11	12	7.1
SER1360-602KL_	6.0	5.50	6.05	28	8.0	9.0	9.5	7.1
SER1360-802KL_	8.0	9.83	10.81	26	7.5	8.5	9.0	5.5
SER1360-103KL_	10	9.83	10.81	24	6.2	7.0	7.5	4.4

- When ordering, please specify **termination** and **packaging** codes:

SER1360-103KLD

- Termination:** **L** = RoHS compliant tin-silver-copper over copper over tin over nickel over phos-bronze.
Special order: **T** = RoHS tin-silver-copper over copper (95.5/4.0/5.0) or **S** = non-RoHS tin-lead (63/37).
Packaging: **D** = 13" machine-ready reel. EIA-481 embossed plastic tape (500 parts per full reel).
B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.

- Inductance measured at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4284A or equivalent.
- DCR measured on a micro-ohmmeter.
- SRF measured using an Agilent/HP 4395A network analyzer and an Agilent/HP 16193A test fixture.
- DC current at 25°C that causes the specified inductance drop from its value without current. [Click for temperature derating information](#).
- Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings. [Click for temperature derating information](#).
- Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Designer's Kit C365 contains 4 each of all values

Core material Ferrite

Core and winding loss See www.coilcraft.com/coreloss

Terminations RoHS compliant tin-silver-copper over copper over tin over nickel over phos-bronze (pins 1 and 2); matte tin over nickel over phos bronze (pin 3). Other terminations available at additional cost.

Weight 2.6 – 2.8 g

Ambient temperature -40°C to $+85^{\circ}\text{C}$ with (40°C rise) Irms current.

Maximum part temperature $+125^{\circ}\text{C}$ (ambient + temp rise). [Derating](#).

Storage temperature Component: -40°C to $+125^{\circ}\text{C}$.

Tape and reel packaging: -40°C to $+80^{\circ}\text{C}$

Resistance to soldering heat Max three 40 second reflows at $+260^{\circ}\text{C}$, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at $<30^{\circ}\text{C}$ / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)
38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332


Packaging 500 per 13" reel; Plastic tape: 24 mm wide, 0.4 mm thick, 16 mm pocket spacing, 6.6 mm pocket depth

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).




Shielded Power Inductors - SER1360 Series



Typical L vs Frequency

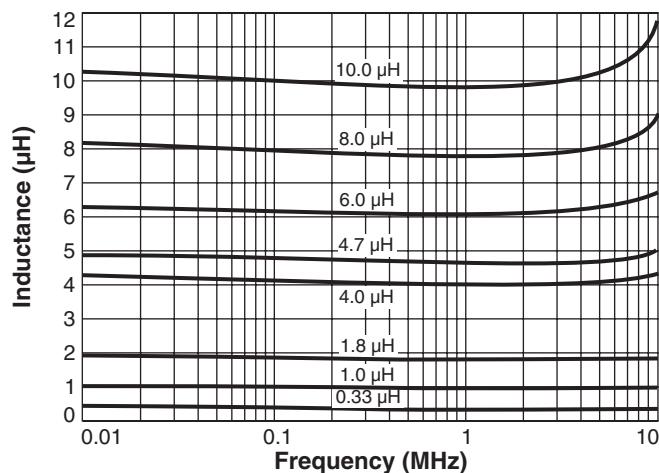

Typical L vs Current

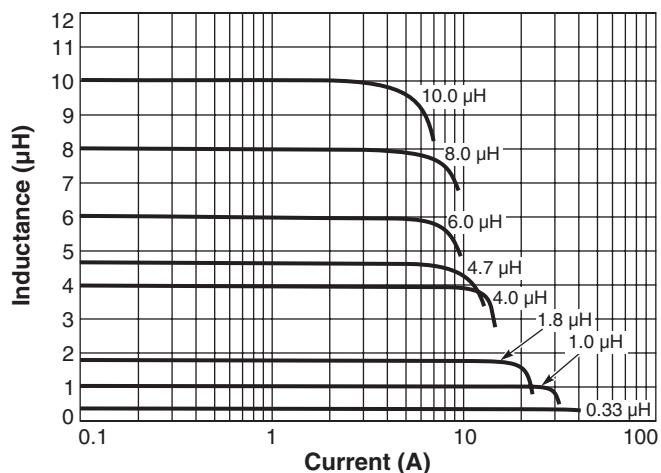

Temperature Rise vs Current

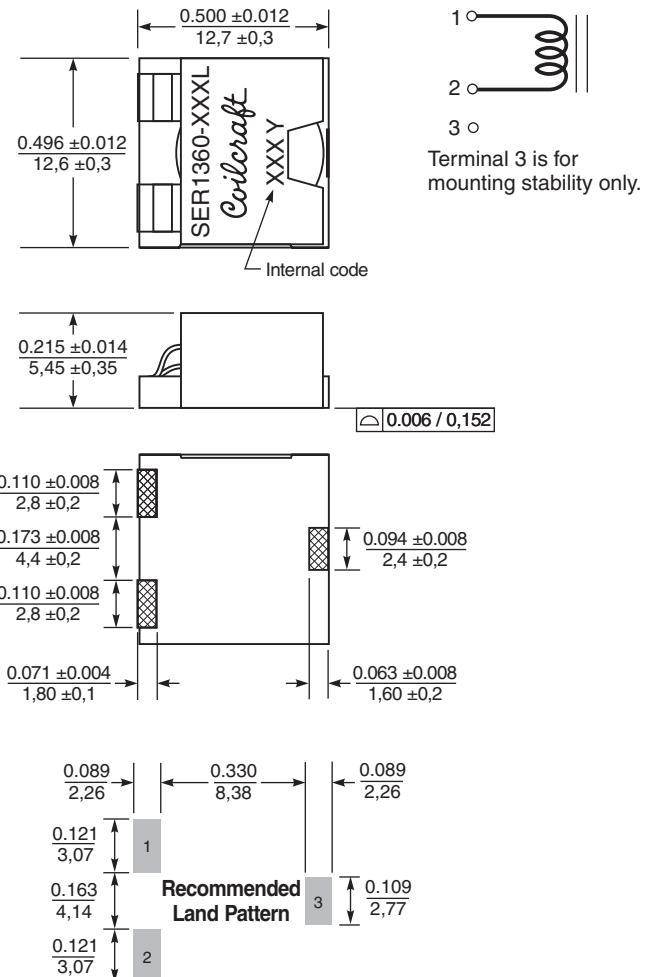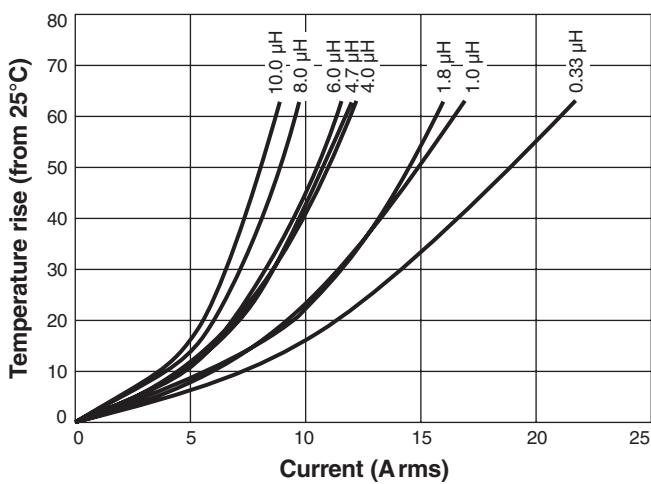

Dimensions are in $\frac{\text{inches}}{\text{mm}}$