

**2N**

# 2N Clip 2wire-IP

## The power of IP via 2 wires

Bring a meaningful upgrade to the retrofit market, not just a routine replacement. The 4" display IP indoor station delivers high-quality video and connects directly to existing legacy cabling.

### Enhance the resident experience

Combine 2N Clip 2wire-IP with other parts of 2N's solutions and offer features like convenient mobile access or our handy intercom to mobile phone calls feature.

### Advantages of a pure IP product

Even when connected to legacy cabling, this product delivers all the advantages of an IP-based system, including the level of reliability you expect from 2N OS-based products.

### Remote management

9 times out of 10 you can handle your customer requests from your home or office, significantly reducing travel time and costs.

### Upgrade to IP video

High-definition IP video enhances building security by providing clear visual identification of visitors, and unlike analogue systems, it's far less prone to signal interference.


### Fast track installation

Experience the 2N installation that's quicker than ever before. Just drill in two screws, connect the legacy 2wire cables, and clip the 2N Clip to the wall!


### Easy to operate

There are only three clearly visible buttons, making the device easy to use for everyone, especially older people. Add a tactile sticker to make it even easier for residents with visual impairments to use.

## Variants

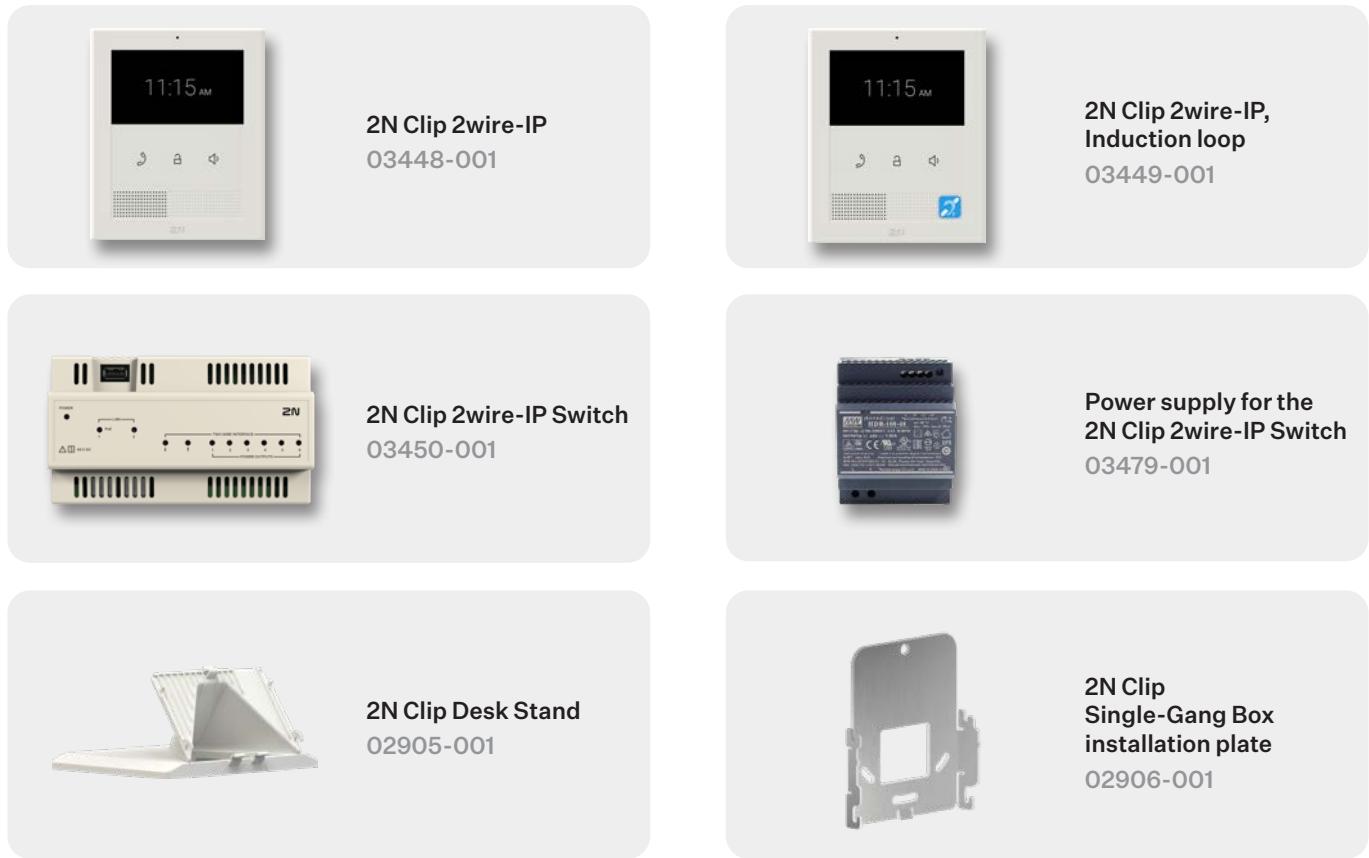

## Connection scheme

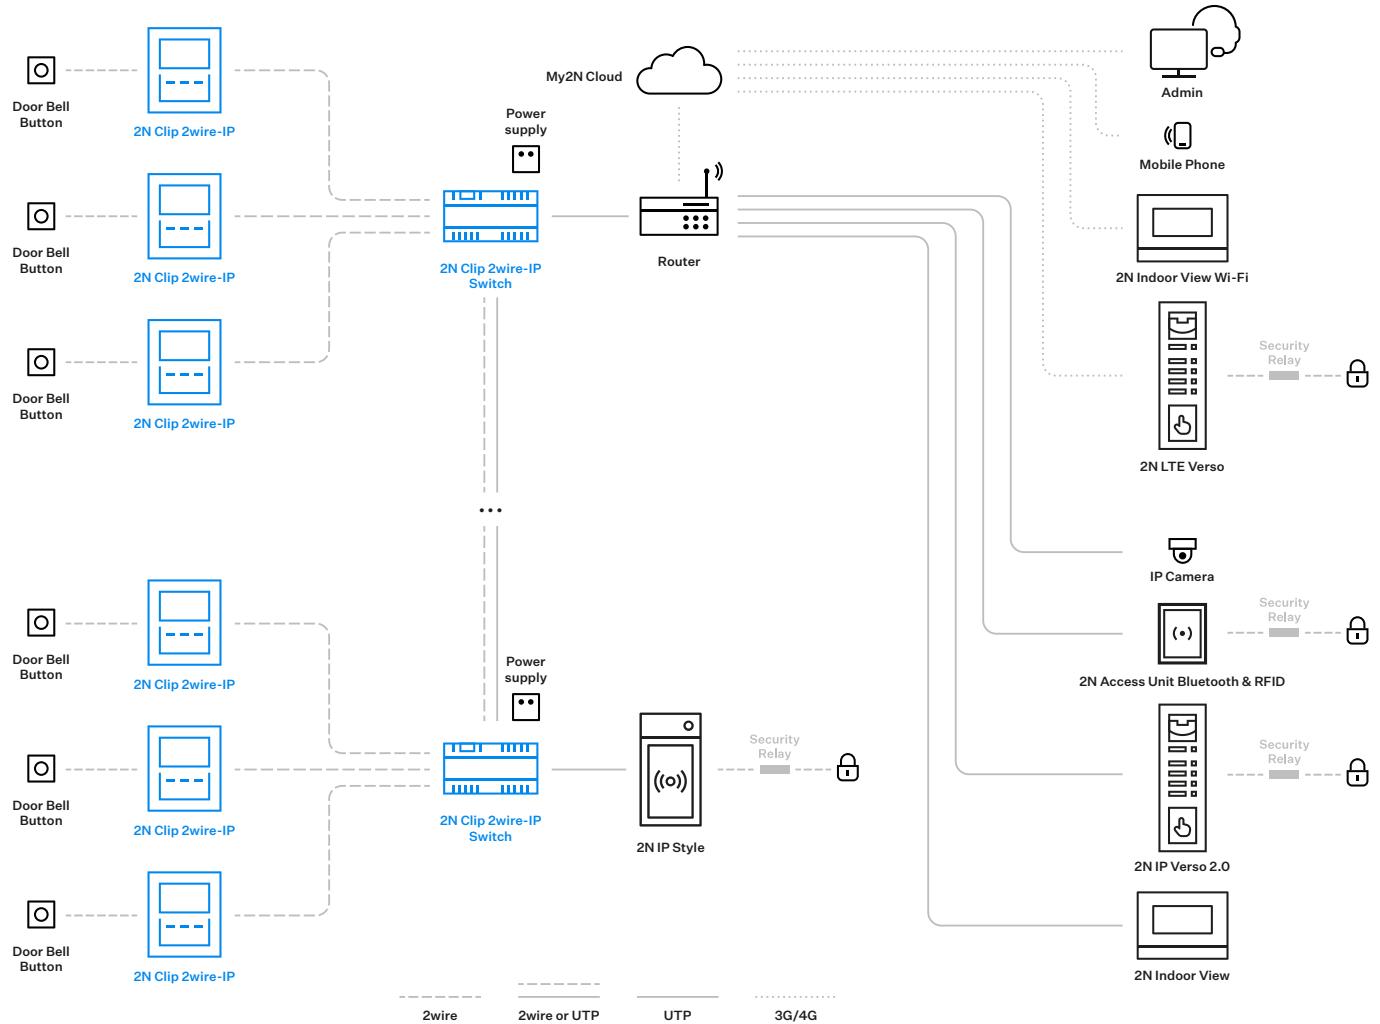

## 2N Clip 2wire-IP

### Technical Parameters

#### Power supply

Type 2wire-IP powered, 48 V DC, 200 mA

#### User interface

Controls 3 capacitive buttons

Operation press and hold the RESET button to restore factory settings

#### Audio

Microphone integrated

Speaker integrated, 2W/8 Ω

Integrated induction loop optional

Codecs G.711a/u, G.722, G.729, L16/16 kHz

#### Video

Display 4.3" colour display

Resolution 480x272 pixels

Codecs H.264

#### Interface

Two wire 2wire-IP

Recommended cabling 1 pair of Cat3 or higher, 24AWG

Important note always verify condition of the legacy cabling before use

#### Doorbell input

Input type switching contact (button/relay)

Contact type normally open (NO)

Contact parameters 12V/20mA, DC

#### Mechanical properties

Dimensions 4.88 x 5.91 x 1.10 in

Weight 0.52 lb

Operating temperature 32 to 122°F

Storage temperature -4 to 158°F

Relative operating humidity 10 to 90 % (non-condensing)

Recommended altitude 0 to 6,500 ft

#### Warranty

5-year warranty. See:  
[https://www.2n.com/en\\_GB/support/warranty-and-repairs](https://www.2n.com/en_GB/support/warranty-and-repairs)

## 2N Clip 2wire-IP Switch

### Technical Parameters

#### Power supply

Type External source, 48V DC, 1,92A

#### Interface

Two wire 6x 2wire-IP (max. 10Mbps data) powered for connection of 2N Clip 2wire-IP

2x 2wire-IP (max. 100Mbps data) passive for connection of another 2N Clip 2wire-IP Switch

LAN 2x10/100BaseT, RJ-45

PoE one LAN port providing 802.3af Class 0 (up to 25W)

USB port Unused (for service purposes only)

Recommended cabling Cat5e or higher, 24AWG

Important note always verify condition of the legacy cabling before use

#### Mechanical properties

Dimensions 6.10 x 3.46 x 2.32 in

Weight 0.69 lb

Operating temperature 14 to 122°F

Storage temperature -4 to 158°F

Relative operating humidity 10 to 90 % (non-condensing)

IP rating IP20

Recommended altitude 0 to 6,500 ft

Mounting DIN-rail mountable into the electrical switchboard

#### Warranty

5-year warranty. See:  
[https://www.2n.com/en\\_GB/support/warranty-and-repairs](https://www.2n.com/en_GB/support/warranty-and-repairs)

Member of the AXIS group



Axis Communications provides 2N sales and support for the Americas and APAC.

**2N.com**