

Impressive Output

Up to 500mj/h (475,000 BTU)
& 1,200mm flame length

Flame Controls

Heating flame adjustment +
Pilot adjustment* +
Squeeze trigger*

*(Included on all models,
except for Handyflame Kit)

★ **MADE IN EUROPE** ★

Unique Swivel Joint
Eliminates hose
torsion/tension

Torch Lengths
1,000mm & 600mm

H/Duty Handle
Screwless Single-piece
molded design

5/8: UNF
Standard/common
connections

Choice of 4 Kits

**HANDYFLAME
KIT**
WC-02988



**MAXFLAME
KIT**
WC-02989



**TORCH ONLY
KIT**
WC-02990



**COMBO
KIT**
WC-02991



Up to 500mj/hr
(475,000 BTU) output



Use with standard
4/9/45kg LPG bottle



Metal Heating
& Weld Pre-heating



Weed Burning



Bitumen Heating
& Concrete Curing



Water-Proofing,
Drying & Thawing



Heat Shrinking/
Wrapping




**More
Info**



All specifications are subject to change without notice. Weldclass accepts no responsibility for any inaccuracies, errors or omissions. Any application information is of a general nature only and is not a substitute for professional and specific advice. Weldclass is 100% Australian family-owned since 1979. Warranty conditions as per Weldclass.com.au/warrantyinfo E.&O.E.

COMBO KIT # WC-02991

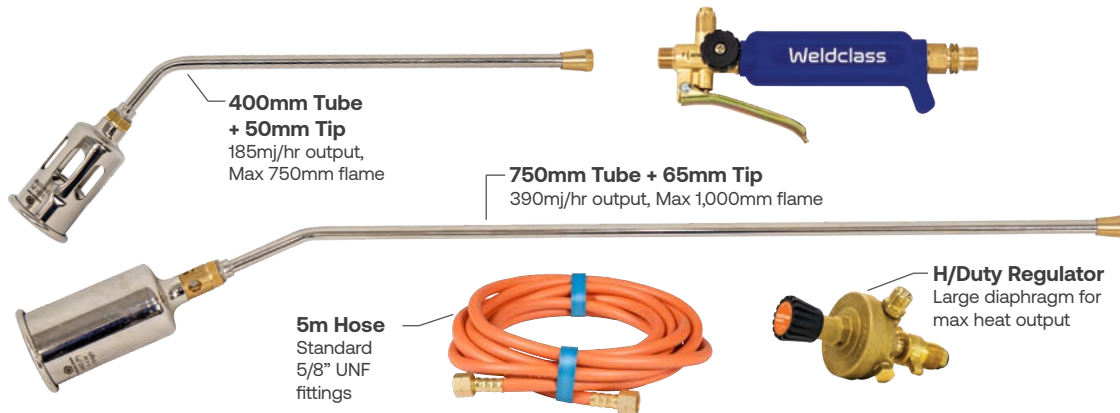

The "all in one" kit with two tube lengths & two tip sizes.

Gas regulator reduces operating pressure to ≤ 400 kpa for reduced gas consumption, more controlled/ consistent gas flow & finer flame adjustment.

\$355 RRP
Incl GST

Indicative price only. Contact a Weldclass distributor for final pricing.

MAXFLAME KIT # WC-02989



Operates on full bottle pressure*, with large tip for maximum heat output & flame size.

*typically 600-1400 kpa depending on ambient temperature

\$269 RRP
Incl GST

Indicative price only. Contact a Weldclass distributor for final pricing.

HANDY FLAME KIT # WC-02988



Budget option with good flame power.


Operates on full bottle pressure.

\$183 RRP
Incl GST

Indicative price only. Contact a Weldclass distributor for final pricing.



TORCH ONLY KIT # WC-02990

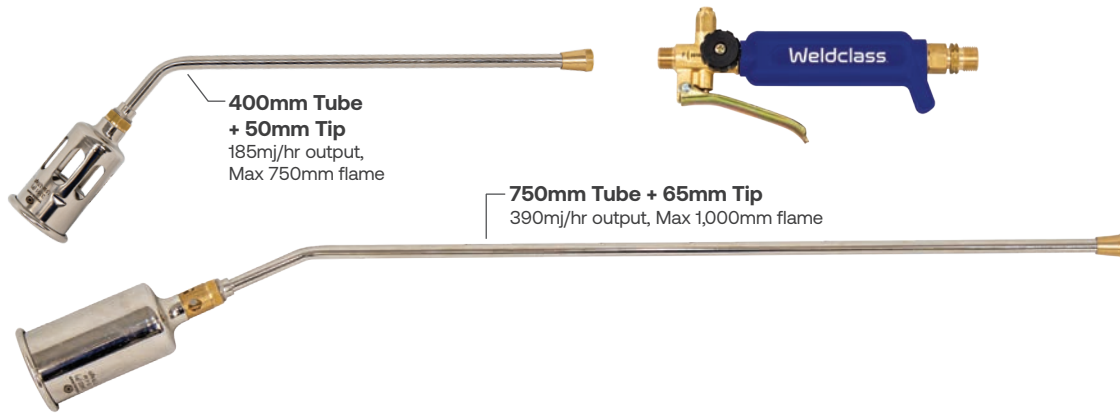

Good choice for fitting to existing hoses & regulator.

Includes two tube lengths & two tip sizes.

\$229^{RRP}
Incl GST

Indicative price only. Contact a Weldclass distributor for final pricing.

Technical Data

Torch Length		With 400mm Tube		With 750mm Tube	
		600mm		1,000mm	
Output	Set Up	With Regulator @ 400kpa		Without Regulator @ 800kpa	
	Kit	Combo		Handyflame	Maxflame
	Tip Size	50mm	65mm	50mm	65mm
Heat / Energy Output		185 Mj/hr	390 Mj/hr	390 Mj/hr	500 Mj/hr
		175,000 BTU	370,000 BTU	370,000 BTU	475,000 BTU
Max Flame Length		750mm	1,000mm	800mm	1,200mm
Gas Consumption		3.7 Kg/hr	7.75 Kg/hr	7.7 Kg/hr	9.9 Kg/hr
Connections / Threads		Regulator/Cylinder Adaptor Inlet		POL Fitting	
		Regulator/Cylinder Adaptor Outlet		5/8” UNF LH Male	
		Hose Fittings		5/8” UNF LH Female	
		Torch Handle Inlet		5/8” UNF LH Male	
		Torch Handle Outlet		M14x1 RH Male	
		Tube Inlet		M14x1 RH Female	
		Tube Outlet		M20x1 RH Male	
		Tip Inlet		M20x1 RH Female	
Regulator Spec.		Output 0-400 kpa. 60mm diaphragm			
Hose Spec.		6mm I.D., max 2,000 kpa working pressure			
Weight		Handle with 750mm tube & 65mm tip: 1.1kg			
Materials / Construction		Handle Grip	Single-piece moulded polymer		
		Handle Body	Brass		
		Handle Lever	2mm pressed steel, nickel-plated		
		Tube & Tips	Nickel-plated steel		

