


MasterView Read-out

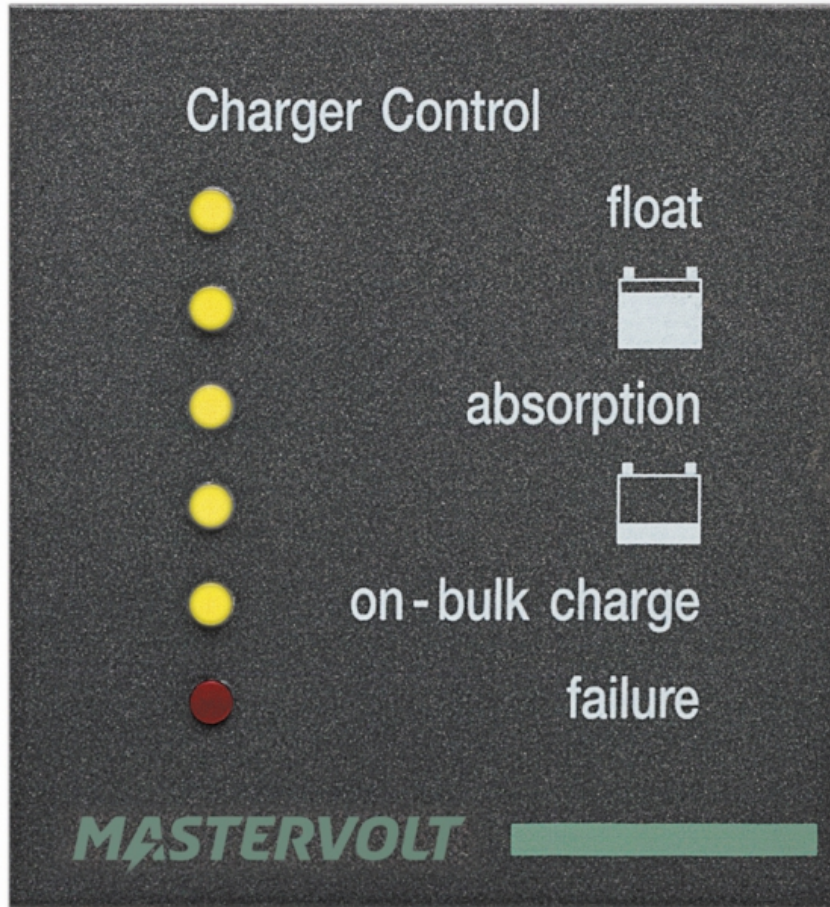

Product code: 77010050

Remote panel for reading the charge status of your battery charger, including error notifications.

Compatibility

The MasterView Read-out panel supports the following battery chargers:

Product code Model

- 44010250 ChargeMaster 12/25-3
- 44010350 ChargeMaster 12/35-3
- 44010500 ChargeMaster 12/50-3
- 44010700 ChargeMaster 12/70-3 (no longer available)
- 44020120 ChargeMaster 24/12-3
- 44020200 ChargeMaster 24/20-3
- 44020300 ChargeMaster 24/30-3
- 44021000 ChargeMaster 24/100-3
- 44310755 ChargeMaster Plus 12/75-3 (CZone)
- 44311005 ChargeMaster Plus 12/100-3 (CZone)
- 44320405 ChargeMaster Plus 24/40-3 (CZone)
- 44320605 ChargeMaster Plus 24/60-3 (CZone)
- 44320805 ChargeMaster Plus 24/80-2 (CZone)
- 44321105 ChargeMaster Plus 24/110-2 (CZone)
- 44210200 PowerCharger 12/20-3 (US)
- 44210400 PowerCharger 12/40-3 (US)
- 40010606 Mass 12/60-2 (no longer available)
- 40010806 Mass 12/80-2 (no longer available)
- 40020156 Mass 24/15-2
- 40020256 Mass 24/25-2
- 40020506 Mass 24/50-2 (DNV GL)
- 40020756 Mass 24/75 (DNV GL, Lloyds)
- 40021006 Mass 24/100 (DNV GL, Lloyds)
- 40031006 Mass 24/100-3ph
- 40040256 Mass 48/25
- 40040506 Mass 48/50
- 44011000 ChargeMaster 12/100-3 (no longer available)
- 44020400 ChargeMaster 24/40-3 (no longer available)
- 44020600 ChargeMaster 24/60-3 (no longer available)
- 44020800 ChargeMaster 24/80-3 (no longer available)
- 44310750 ChargeMaster 12/75-3 (no longer available)
- 44311000 ChargeMaster Plus 12/100-3 (no longer available)
- 44320400 ChargeMaster Plus 24/40-3 (no longer available)
- 44320600 ChargeMaster Plus 24/60-3 (no longer available)

Specifications

General specifications

Display/read-out
Dimensions, h x w

7 LEDs
60 x 65 mm
2.4 x 2.6 x 0.0 inch
0.07 kg
0.2 lb

Weight

Technical specifications

MasterBus connection
Power
Power consumption
Protection degree

yes
via MasterBus
144 m W
IP21