


# KGD-K118-4G-PC-BL-Z

# Konec

Smart Switch, Floating Button, Neutral Required, 4G,  
Max.INC700W/LED300W Per Gang, Blue indicator light, Zigbee, Plastic, Black

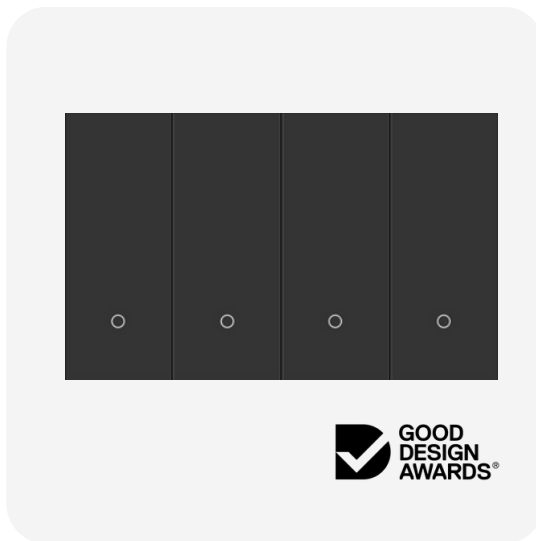

## KONEC SMART SWITCH K118 FLOATING BUTTON 4G PLASTIC BLACK

**SKU: KSS00336**

The Konec Smart Switch connects to the network in your home through the Zigbee gateway. It allows you to turn on/off lights through buttons, app, as well as voice control via Amazon Alexa, Google Home and Siri Shortcuts.

Scan the QR Code to download Arks by Konec Solutions App



## FEATURES



### UP TO 4 GANG

The switch has a range of 1 - 4 gangs, all switches can be used as a smart scene button with or without load.



### APP CONTROL

The on/off status of the switch can be controlled remotely through the app.



### SCENE CONTROL

Control multiple smart devices to your desired settings with a single tap.



### SCHEDULE

Set scheduled/countdown timers to turn on/off at specified time.



### STATUS INDICATION

Built-in LED lights that discreetly indicate the on/off status.



### OTA UPDATE

Receive the latest firmware notifications and update using the app.

## SPECIFICATIONS

|                              |                                       |
|------------------------------|---------------------------------------|
| <b>Input Voltage</b>         | AC110V - 240V, 50/60Hz                |
| <b>Rated Current</b>         | Max. 16A                              |
| <b>Max. Load /per Gang</b>   | INC 700W LED 300W                     |
| <b>Connection Type</b>       | Zigbee                                |
| <b>Operating Frequency</b>   | 2.400~ 2.483GHz                       |
| <b>Standby Consumption</b>   | ≤ 0.5W                                |
| <b>Transmit Power</b>        | Max. 20dBm                            |
| <b>Wiring Type</b>           | Active Wire & Neutral Wire            |
| <b>Product Size</b>          | 118 x 73 x 36.4mm                     |
| <b>Operating Environment</b> | -10 ~ 55°C, ≤ 80% RH (Non-Condensing) |
| <b>Storage Environment</b>   | -10 ~ 55°C, ≤ 80% RH (Non-Condensing) |
| <b>Indicator Light</b>       | Blue LED                              |

## VARIATION

### COLOUR & MATERIAL



PLASTIC  
BLACK



GLASS  
WHITE



BRUSHED METAL  
BLACK

### CUSTOMISABLE BRUSHED METAL COLOURS

#### SPECIAL ORDER



Red



Silvery  
White



Golden



Bright  
Pink



Dynamic  
Red



Yellow



Summery  
Sky



Olive  
Green



Sky  
Blue




Grey  
Green




Umber

## DIMENSIONS


### 1 GANG






### 2 GANG



### 3 GANG



### 4 GANG

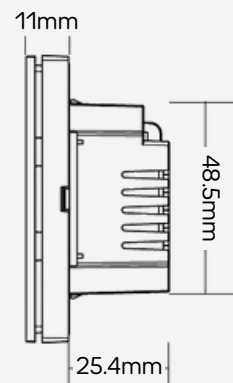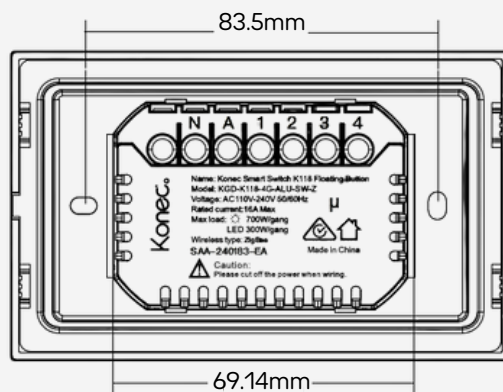

## Disclaimer

This document provides technical specifications for the Konec Smart Switch K118 Floating Button and is intended for reference only. Product specifications, features, and visuals may change without prior notice. For the most current product specifications, visit [www.konecHOME.com.au](http://www.konecHOME.com.au). Konec Solutions Pty Ltd makes no guarantees regarding the completeness, accuracy, or currentness of this document. Users are responsible for verifying compatibility, suitability, and compliance with local regulations before purchase, installation, or use. To the extent permitted by law, Konec Solutions disclaims any liability for direct, indirect, incidental, or consequential damages resulting from reliance on this document.

Nothing in this disclaimer limits or excludes your rights under the Australian Consumer Law or the New Zealand Consumer Guarantees Act 1993.

Konec Solutions Pty Ltd.  
<https://www.konecHOME.com.au/>  
 1300 2 56632 (1300 2 KONEC)  
[info@konec.com.au](mailto:info@konec.com.au)