



Quick Start Guide

VIGI Network Camera

Images may differ from your actual products.



For technical support, the user guide and more information, please visit
<https://www.tp-link.com/support>.

© 2022 TP-Link 7106509974 REV1.3.0



CONTENTS


01 / English	33 / Română
05 / Български	37 / Slovenčina
09 / Čeština	41 / Slovenščina
13 / Hrvatski	45 / Srpski jezik/Српски језик
17 / Latviešu	49 / Қазақша
21 / Lietuvių	53 / Русский язык
25 / Magyar	57 / Українська мова
29 / Polski	61 / Eesti

Mount Your Camera

Mount your camera according to the diagrams in the **Quick Start Guide** included in the package.

Use Your Camera with an NVR

The camera works with an NVR for easier batch access and management. Here we use a VIGI NVR as an example.

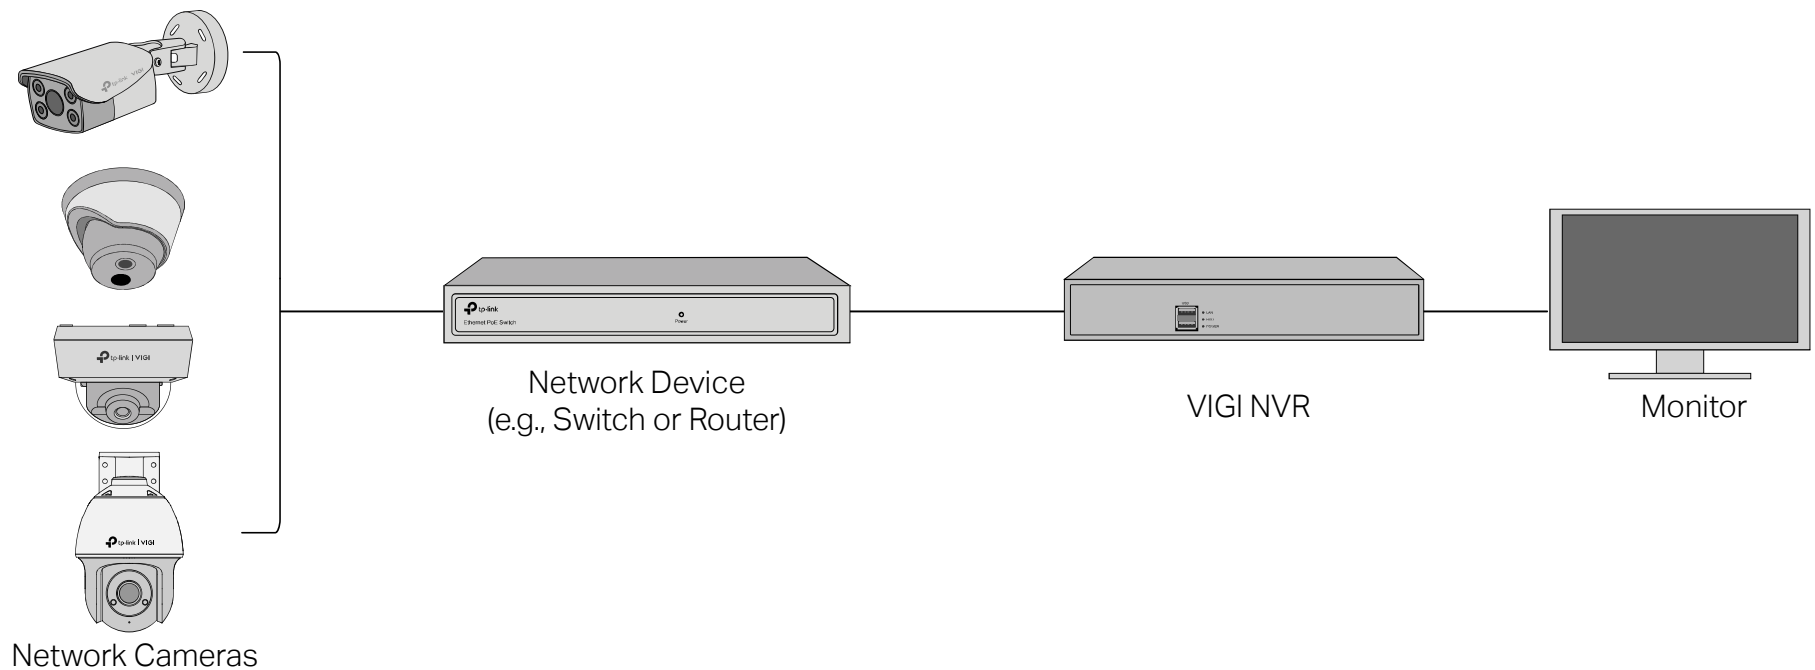

- 1 Connect your cameras to the same network as your NVR (as shown above).

2 Power on your cameras with the PoE power supply or an external power supply.

Note: The camera's standard power supply is 12V DC or PoE (802.3af/at). The power source should comply with Power Source Class 2 (PS2) or Limited Power Source(LPS) of IEC 62368-1. Some models do not support DC power supply. You can check the detailed specifications on the product page at <https://www.tp-link.com/>.

3 Add your cameras with the NVR.

Before you start, make sure the NVR is working properly. Then add your camera with the NVR.

- 1) Go to the NVR management page, right click on the screen, and click **Add Camera**.
- 2) Select your camera and click **+** to add your camera directly. If you have disabled Plug & Play on your NVR, create a password or use a preset password for your camera.

 Done! You can now view live video and manage cameras.

Using your cameras with other NVR brands

- 1 Power on your cameras and connect them to the network.
- 2 Activate the camera using the **VIGI Security Manager** or **VIGI** app (refer to the next section).
- 3 Refer to the NVR's User Manual to add cameras.

More Management Methods

You can also access and manage your cameras via any of the methods below.

Method 1: Via the VIGI App

Remotely view live video, manage cameras, and get instant alerts.

- 1 Download and install the **VIGI** app.



- 2 Open the **VIGI** app and log in with your TP-Link ID. If you don't have an account, sign up first.
- 3 Tap the **+** button on the top right and follow the app instructions to activate and add your cameras.

Method 2: Via a Web Browser

Note: Some models do not support web management. You can check the detailed specifications on the product page at <https://www.tp-link.com/>.

View live video and modify camera settings via a web browser.

1. Find the camera's IP address on your router's client page.
2. On your local computer, open a web browser and enter <https://camera's IP address>

(<https://192.168.0.60> by default).

3. Select your Country/Region and Time Zone.

4. Set a password to activate the camera.

Done. You can view the live video on the Preview page, and go to the Settings page to change camera settings.

Method 3: Via the VIGI Security Manager (Windows only)

View live video and modify camera settings on your computer.

- 1 Download the VIGI Security Manager on your computer at <https://www.tp-link.com/download-center/>
- 2 Install the VIGI Security Manager and open it.
- 3 Cameras on the same network as your computer can be automatically discovered. Go to **Settings > Discovered Devices**, click **+ Add** to activate your discovered cameras by setting passwords, and follow the instructions to add your cameras.

For frequently asked questions, please refer to

<https://www.tp-link.com/support/faq/2850/>