



FDH70 Electromagnetic Door Holder Installation Instructions

Input:
Dual Voltage, 12/24VDC (Factory default is 12VDC)

Current:
12VDC/100mA
24VDC/50mA.


Function: The FSH FDH70 is a Wall Mount Door Holder.

Holding Force: Tested up to 75kg


Dimensions:
Magnet: 90(H) x 69.5(W) x 40(D) mm
Armature: 55.5mm (Ø)

Wiring Instructions

- 1. Set the jumper position to the correct power input before switching on the power.
- 2. Ensure the power supply input wiring polarity is correct.
- 3. White wire is Negative (-) and Black wire is Positive (+).



Dimensions (mm) and Typical Installation

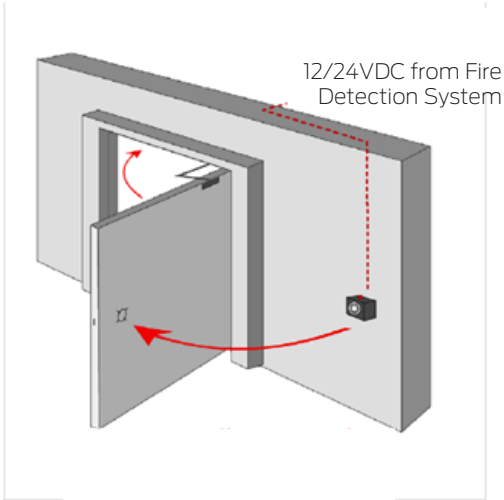

PDFS0021



Allegion (Australia) Pty Ltd
Phone 1800 098 094
Website www.allegion.com.au

Allegion (New Zealand) Limited
Phone 0800 477 869
Website www.allegion.co.nz