


Unique quick-clutch feature - for fast positioning

Straight or Bevel Cutting

Use with Oxy / Acetylene or Oxy/LPG
Supplied with both Acetylene & LPG Tips


- Ideal for cutting steel pipes 100mm OD or larger. Chain is used to hold the cutter & guide it around the pipe. Cutter is propelled by hand-crank.
- Robust design
- Uses Common Chain Design – chain is interchangeable with other machines
- Horizontal and Vertical Torch Adjustment
- Lightweight & Portable

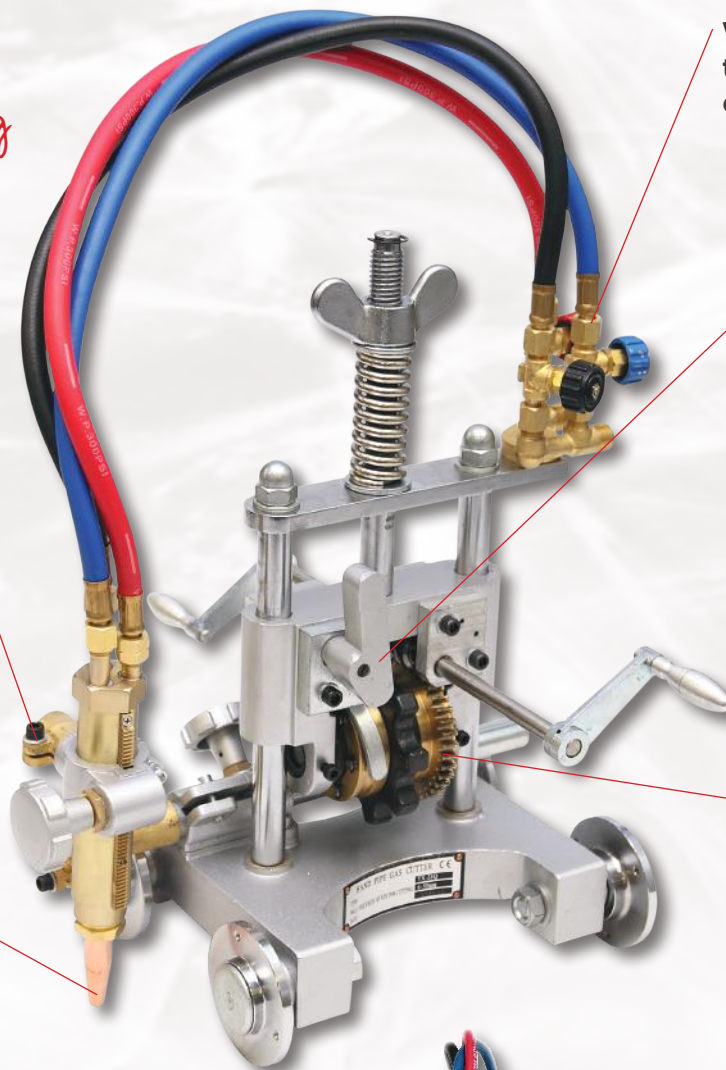

Valves located away from the Torch for easy & safe operation

Unique Quick-Clutch Feature
Quickly engages or disengages the drive sprocket to allow fast positioning of the machine by hand, prior to cutting

Backlash-Free Worm Drive system for smooth cutting

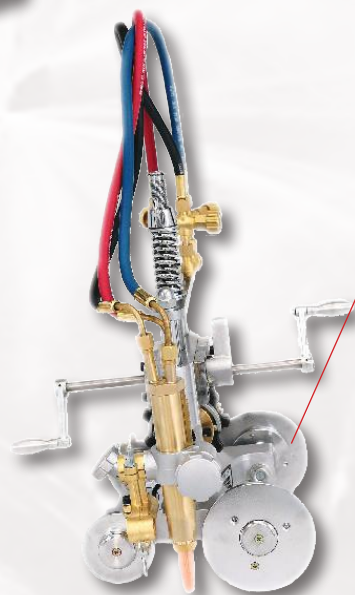

Supplied with additional wheel flanges
Which bolt onto existing front wheels to increase chassis clearance for cutting smaller diameter pipes

For more info





Part No.	Description	Unit	Inner Qty	Outer Qty
5-TX21Q	TX-21Q Pipe Cutter w/Quick-Clutch & 2.4m Chain	Each	1	1
5-TX21CHAIN	Chain Std Cast Metal 2.4m	Each	1	1

Technical Data

Pipe Diameter	Minimum 100mm O.D. Maximum: Approx. 600mm O.D. with one length of chain, additional chain can be added to cut larger pipe
Cutting Thickness	Up to 50mm wall thickness
Bevel Angle	0° – 45°
Cutting Tips	Uses 3-seat machine cutting tips Oxy/Acetylene – Type 51 Oxy/LPG – Type 54
Gas	Oxy & Acetylene or Oxy & LPG
Gas Inlet Connections	5/8" UNF (Standard Australian oxy connection)
Dimension	Approx 280mm x 280mm x 450mm high
Weight	Approx 13kg
Warranty	6 months
Also Known as	Oxy gas pipe cutter with chain, oxy acetylene & oxy lpg flame cutting, portable manual pipe cutting machine for steel pipe, chain and gear hand crank drive pipe cutter

