


TAPERED ROLLER METRIC

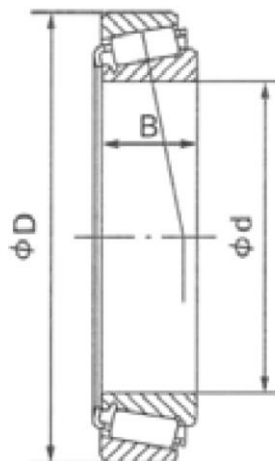

Part No.	d(mm)	D(mm).1	B(mm)	Dynamic load(kN)	Static load(kN)	N.W.(kg)
30202	15	35	11.75	14.5	15.8	0.053
30203	17	40	13.25	20.2	20.4	0.07
30204	20	47	15.25	29.5	30.5	0.12
30205	25	52	16.25	31.5	33.7	0.152
30206	30	62	17.25	43.5	48	0.22
30207	35	72	18.25	54.5	60.5	0.32
30208	40	80	19.75	63.5	70.5	0.42
30209	45	85	20.75	69.5	81.5	0.47
30210	50	90	21.75	79	96	0.53
30211	55	100	22.75	94.5	113	0.69
30212	60	110	23.75	104	123	0.86
30213	65	120	24.75	128	156	1.16
30214	70	125	26.25	138	173	1.3
30215	75	130	27.25	142	181	1.39
30216	80	140	28.25	161	202	1.68
30217	85	150	30.5	182	231	2.12
30218	90	160	32.5	204	261	2.6
30219	95	170	34.5	231	299	3.14
30220	100	180	37	258	338	3.76
30221	105	190	39	247	310	4.15
30222	110	200	41	310	415	5
30224	120	215	43.5	325	440	6.01
30226	130	230	43.75	375	505	7.25
30228	140	250	45.75	370	490	5.2
30302	15	42	14.25	19.2	21.9	0.095
30303	17	47	15.25	27.6	30	0.13
30304	20	52	16.25	35	35.5	0.17
30305	25	62	18.25	48.2	46.9	0.265

Every effort has been taken to ensure that the data listed in this catalogue is correct.
Industrial World will not accept liability for any damage or loss caused as a result of the data in this catalogue.

Part No.	d(mm)	D(mm).1	B(mm)	Dynamic load(kN)	Static load(kN)	N.W.(kg)
30306	30	72	20.75	59.6	60.1	0.399
30307	35	80	22.75	76	79	0.54
30308	40	90	25.25	90.6	101	0.756
30309	45	100	27.25	113	128	0.999
30310	50	110	29.25	137	152	1.29
30311	55	120	31.5	148	170	1.56
30312	60	130	33.5	173	201	2.03
30313	65	140	36	204	239	2.52
30314	70	150	38	230	276	3.05
30315	75	160	40	250	297	3.52
30316	80	170	42.5	290	350	4.05
30317	85	180	44.5	260	298	4.74
30318	90	190	46.5	288	330	5.55
30319	95	200	49.5	330	390	6.55
30320	100	215	51.5	365	430	8
30322	110	240	54.5	400	465	10.5
30324	120	260	59.5	460	545	13.5
31308	40	90	25.25	80.5	90.2	0.744
31309	45	100	27.25	95.1	107	0.964
31310	50	110	29.25	115	133	1.24
31311	55	120	31.5	129	148	1.58
31312	60	130	33.5	153	179	1.99
31313	65	140	36	176	209	2.43
31315	75	160	40	218	261	3.4
31316	80	170	42.5	236	283	4
31318	90	190	46.5	252	297	5.4
31319	95	200	49.5	310	400	6.45
31320	100	215	56.5	288	330	7.9
32004X	20	42	15	25.1	28.2	0.1
32005X	25	47	15	28	34	0.11
320/328X	28	52	16	31.4	40.4	0.14
32006X	30	55	17	37.5	46.5	0.17
32007X	35	62	18	44.5	57.5	0.22
32008X	40	68	19	52.5	71.5	0.27
32009X	45	75	20	59.5	86	0.34
32010X	50	80	20	62	90.5	0.37
32011X	55	90	23	82.5	122	0.55
32012X	60	95	23	86.1	127	0.61

Every effort has been taken to ensure that the data listed in this catalogue is correct.
Industrial World will not accept liability for any damage or loss caused as a result of the data in this catalogue.

Part No.	d(mm)	D(mm).1	B(mm)	Dynamic load(kN)	Static load(kN)	N.W.(kg)
32013X	65	100	23	90	137	0.65
32014X	70	110	25	108	163	0.87
32015X	75	115	25	110	169	0.91
32016X	80	125	29	147	225	1.29
32017X	85	130	29	150	234	1.36
32018X	90	140	32	178	267	1.76
32019X	95	145	32	182	287	1.84
32020X	100	150	32	185	298	1.92
32021X	105	160	35	204	330	2.42
32022X	110	170	38	235	360	3.06
32024X	120	180	38	241	400	3.24
32026X	130	200	45	315	530	3.93
32028X	140	210	45	320	540	5.23
32030X	150	225	48	370	645	6.35
32204	20	47	19.25	27.5	28	0.23
32206	30	62	21.25	53	61.5	0.28
32207	35	72	24.25	70	86	0.43
32208	40	80	24.75	78	91.5	0.53
32209	45	85	24.75	83.5	102	0.58
32210	50	90	24.75	88.5	111	0.61
32211	55	100	26.75	110	137	0.83
32212	60	110	29.75	131	167	1.14
32213	65	120	32.75	156	200	1.5
32214	70	125	33.25	157	205	1.61
32215	75	130	33.25	165	221	1.7
32216	80	140	35.25	192	254	2.04
32217	85	150	38.5	212	280	2.61
32218	90	160	42.5	255	345	3.36
32219	95	170	45.5	285	390	4.06
32220	100	180	49	315	465	4.99
32221	105	190	53	360	510	5.9
32222	110	200	56	395	565	6.9
32224	120	215	61.5	420	600	8.45
32226	130	230	67.75	480	690	10.4
32228	140	250	71.75	560	815	13.2
32230	150	270	77	610	900	16.8
32303	17	47	20.25	30.5	35.9	0.17
32304	20	52	22.25	45.1	46.7	0.239
32305	25	62	25.25	61.2	64.1	0.378


Every effort has been taken to ensure that the data listed in this catalogue is correct.
Industrial World will not accept liability for any damage or loss caused as a result of the data in this catalogue.

Part No.	d(mm)	D(mm).1	B(mm)	Dynamic load(kN)	Static load(kN)	N.W.(kg)
32306	30	72	28.75	82.2	91.6	0.579
32307	35	80	32.75	101	114	0.758
32308	40	90	35.25	116	139	1.04
32309	45	100	38.25	146	180	1.4
32310	50	110	42.25	176	220	1.86
32311	55	120	45.5	200	250	2.35
32312	60	130	48.5	232	295	2.86
32313	65	140	51	276	357	3.64
32314	70	150	54	317	414	4.43
32315	75	160	58	355	470	5.22
32316	80	170	61.5	380	500	6.12
32317	85	180	63.5	410	540	6.8
32318	90	190	67.5	395	500	8.05
32319	95	200	71.5	450	585	11
32320	100	215	77.5	465	670	14.9
32907	35	55	14	26.2	40	0.13
32908	40	62	15	32	46	0.18
32909	45	68	15	34.5	57	0.2
32910	50	72	15	35.5	60.5	0.21
32911	55	80	17	47	77	0.31
32912	60	85	17	45.5	76	0.33
32913	65	90	17	49.5	87	0.36
32914	70	100	20	70.5	114	0.53
33007	35	62	21	46	71	0.52
33008	40	68	22	59	82	0.33
33009	45	75	24	64.5	99	0.44
33010	50	80	24	67	107	0.45
33011	55	90	27	86.5	140	0.7
33012	60	95	27	92.5	148	0.73
33013	65	100	27	98	160	0.78
33014	70	110	31	126	198	1.1
33015	75	115	31	129	206	1.15
33016	80	125	36	157	277	1.65
33017	85	130	36	172	285	1.74
33018	90	140	39	216	355	2.2
33019	95	145	39	226	382	2.29
33020	100	150	39	231	397	2.39
33021	105	160	43	240	400	3.05
33022	110	170	47	273	465	3.89

Every effort has been taken to ensure that the data listed in this catalogue is correct.
Industrial World will not accept liability for any damage or loss caused as a result of the data in this catalogue.


Part No.	d(mm)	D(mm).1	B(mm)	Dynamic load(kN)	Static load(kN)	N.W.(kg)
33024	120	180	48	281	495	4.2
33026	130	200	55	390	720	6.44
33108	40	75	26	77.5	102	0.52
33109	45	80	26	79.5	108	0.56
33110	50	85	26	84.5	120	0.6
33111	55	95	30	114	161	0.86
33112	60	100	30	117	166	0.94
33113	65	110	34	152	223	1.3
33116	80	130	37	191	294	1.9
33118	90	150	45	258	413	3.13
33205	25	52	22	47	56	0.22
33206	30	62	25	66	79	0.35
33207	35	72	28	86.7	107	0.54
33208	40	80	32	108	139	0.75
33209	45	85	32	112	149	0.8
33210	50	90	32	118	165	0.86
33211	55	100	35	141	193	1.18
33212	60	110	38	131	167	1.56

TAPERED ROLLER INCH

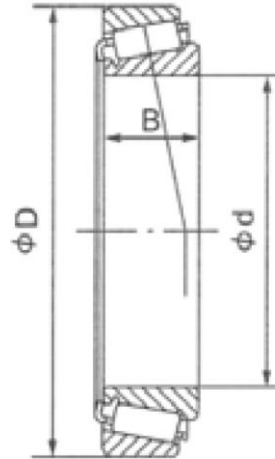


Part No.	d(mm)	D(mm)	B(mm)	Dynamic load(kN)	Static load(kN)	N.W.(kg)
11590/11520	15.875	42.862	14.288	17.4	17.3	0.1
LM11749/LM11710	17.462	39.878	13.843	23	23.4	0.08
09067/09195	19.05	49.225	18.034	37.5	37.5	0.18
09074/09195	19.05	49.225	19.845	37.5	37.5	0.18
09074/09196	19.05	49.225	23.02	37.5	37.5	0.2
LM11949/LM11910	19.05	45.237	15.494	29.9	30.5	0.13
09081/09196	20.625	49.225	23.02	37.8	37.7	0.2
M12649/M12610	21.43	50.005	17.526	37	37.5	0.17
LM12749/LM12710	22	45.237	15.494	30.1	34.6	0.11
07087/07196	22.225	50.005	13.495	26	27.7	0.13
07100/07196	25.4	50.005	13.495	26	27.7	0.12
07100S/07210X	25.4	50.8	15.011	26	27.7	0.13
15101/15245	25.4	62	19.05	45	54.5	0.3
L44643/L44610	25.4	50.292	14.224	28.5	34	0.12
L44649/L44610	26.988	50.292	14.224	28.3	33	0.12
02474/02420	28.575	68.263	22.225	51	61.1	0.4
M86649/M86610	30.162	64.292	21.433	55	72.5	0.34
15123/15245	31.75	62	18.161	43.5	51.5	0.24
15126/15245	31.75	62	19.05	45	54.5	0.25
HM88542/HM88510	31.75	73.025	29.37	74.2	100.6	0.61
LM67048/LM67010	31.75	59.131	15.875	36.5	43.5	0.18
LM67049A/LM67010	31.75	59.131	15.875	36.3	51	0.18
LM67049A/LM67014	31.75	61.986	15.875	36.3	51	0.2
14131/14276	33.338	69.012	19.845	46.1	55	0.34
M88048/M88010	33.338	68.262	22.225	56.5	71.5	0.32
14138A/14276	34.925	69.012	19.845	44.5	55	0.32
HM88649/HM88610	34.925	72.233	25.4	66.9	87.4	0.49

Every effort has been taken to ensure that the data listed in this catalogue is correct.
Industrial World will not accept liability for any damage or loss caused as a result of the data in this catalogue.

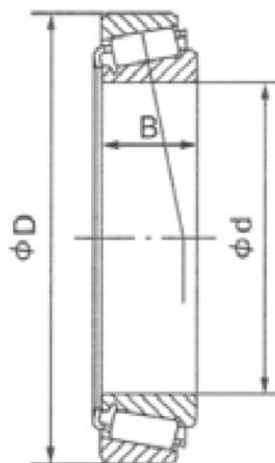

Part No.	d(mm)	D(mm)	B(mm)	Dynamic load(kN)	Static load(kN)	N.W.(kg)
HM89446/HM89410	34.925	76.2	29.37	73	109	0.64
LM48548/LM48510	34.925	65.088	18.034	48.5	59	0.25
L68149/L68110	34.987	59.131	15.875	35.7	48.5	0.17
L68149/L68111	34.987	59.975	15.875	35.7	48.5	0.18
JL69349/JL69310	38	63	17	34	49	0.2
13686/13621	38.1	69.012	26.195	49.2	61.6	0.35
13687/13621	38.1	69.012	19.05	49.2	61.6	0.29
25572/25520	38.1	82.931	23.812	77.9	101.2	0.64
2788/2720	38.1	76.2	23.812	68	81	0.5
2789/2720	39.688	76.2	23.812	73	92	0.47
LM300849/LM300811	41	68	17.5	43.3	58.2	0.24
18590/18520	41.275	73.025	16.667	46.5	57	0.29
LM501349/LM501310	41.275	73.431	19.558	57.8	73	0.34
25577/25523	42.875	82.931	26.988	78.5	98	0.63
25580/25520	44.45	82.931	23.812	78.5	98	0.56
25580/25522	44.45	83.058	23.876	77.9	101.2	0.55
LM102949/LM102911	45.242	73.431	21.43	55.9	78.3	0.33
LM603049/LM603011	45.242	77.788	19.842	57.1	73.5	0.36
LM603049/LM603012	45.242	77.788	21.43	57.1	73.5	0.38
LM503349/LM503310	45.987	74.976	18	53	75	0.3
LM503349A/LM503310	45.987	74.976	18	53	75	0.3
JLM104948/JLM104910	50	82	21.5	71.7	97.9	0.43
JLM104948/LM104912	50	82.931	21.115	61.2	83.3	0.43
368A/362A	50.8	88.9	20.638	74.3	87.3	0.5
3780/3720	50.8	93.264	30.163	103	137	0.84
LM104949/LM104911	50.8	82.55	21.59	71	96	0.44
JLM506849/JLM506810	55	90	23	77	110	0.55

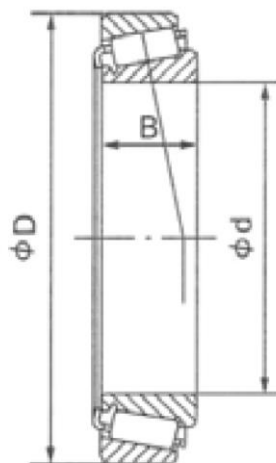

Part No.	d(mm)	D(mm)	B(mm)	Dynamic load(kN)	Static load(kN)	N.W.(kg)
JLM506849/JLM506810	55	90	23	77	110	0.55
387/382A	57.15	96.838	21	82.4	103.7	0.6
387AS/382A	57.15	96.838	21	82.4	103.7	0.59
469/453X	57.15	104.775	30.162	109	144	1.06
28985/28921	60.325	100	25.4	91.4	137	0.76
395/394A	63.5	110	22	87.5	117	0.83
3982/3920	63.5	112.712	30.162	111	164	1.23
HM212049/HM212010	66.675	122.238	38.1	187	243	1.85
HM212049/HM212011	66.675	122.238	38.1	191	249	1.86
580/572	82.55	139.992	36.512	171	255	2.16
749/742	85.026	150.089	44.45	253	345	3.2
6580/6535	88.9	161.925	53.975	305	460	4.75
HM518445/HM518410	88.9	152.4	39.688	275	404	2.88
HM218248/HM218210	89.975	146.975	40	306	310	2.44
594A/592A	95.25	152.4	39.688	183	285	2.5
938/932	114.3	212.725	66.675	455	665	9.79