




## HYDRAULIC CYLINDERS

### AG CYLINDERS - 1.5" BORE

Part Number	Stroke	Closed	Open	Description
TAG 1502D	2"	11.5"	13.5"	Maximum Pressure: 3500psi (240bar)  Ports: 9/16" UNO  Pins: 3/4" pins
TAG 1504D	4"	13.5"	17.5"	
TAG 1506D	6"	15.5"	21.5"	
TAG 1508D	8"	17.5"	25.5"	
TAG 1510D	10"	19.5"	29.5"	
TAG 1512D	12"	21.5"	33.5"	
TAG 1514D	14"	23.5"	37.5"	
TAG 1516D	16"	25.5"	41.5"	
TAG 1518D	18"	27.5"	45.5"	
TAG 1520D	20"	29.5"	49.5"	
TAG 1524D	24"	33.5"	57.5"	
TAG 1530D	30"	39.5"	69.5"	
TAG 1536D	36"	45.5"	81.5"	
TAG 1548D	48"	57.5"	105.5"	

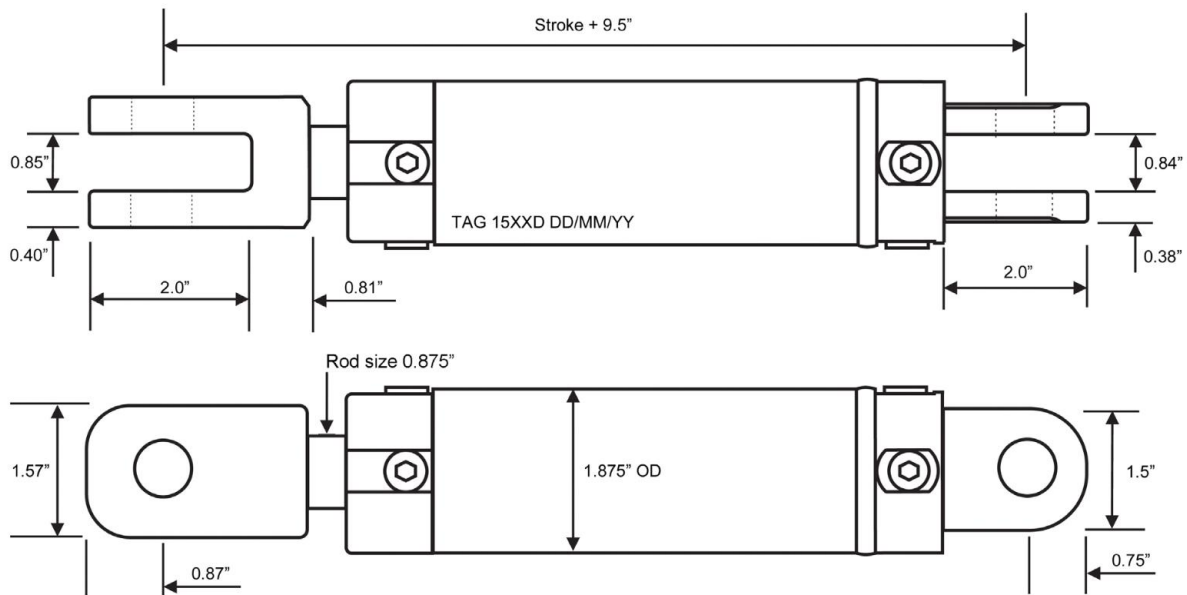

	Theoretical Cylinder Thust - 1.5" Bore									
Pressure (Bar)	20	40	60	80	100	120	140	160	180	200
Extension Force (N)	2280	4560	6840	9120	11400	13680	15960	18240	20520	22800
Retraction Force (N)	1500	3010	4510	6020	7520	9030	10530	12030	13540	15040

