

HD 5/12 C PLUS

Convenient, mobile and versatile: the HD 5/12 C Plus cold water blaster features horizontal and vertical operation. With accessory storage, brass cylinder head and automatic pressure relief.



Made in Germany



Order no.

1.520-909.0

- Automatic pressure relief
- For vertical and horizontal operation
- Save energy and time: EASY!Force high-pressure guns and EASY!Lock quick-release locks.

Technical data

EAN code		4054278164205
Current type	Ph / V / Hz	1 / 240 / 50
Flow rate	l/h	500
Feed temperature	°C	up to 60
Working pressure	bar / MPa	115 / 11.5
Max. pressure	bar / MPa	175 / 17.5
Connected load	kW	2.3
Power cable	m	5
Nozzle size	mm	38
Water inlet		3/4"
Colour		anthracite
Weight (with accessories)	kg	24.6
Weight incl. packaging	kg	27
Dimensions (L × W × H)	mm	380 × 360 × 930

Equipment

Spray gun		EASY!Force
High-pressure hose length	m	10
High-pressure hose specification		DN 6, 200 bar
Spray lance	mm	840
Dirt blaster		■
Cleaning agent function		Suction
Pressure switch-off		■

■ Included in delivery.



Save energy and time: EASY!Force high-pressure guns and EASY!Lock quick-release locks.

- At last - work without getting tired: the EASY!Force high-pressure gun.
- EASY!Lock quick-release locks: durable and robust. And five times faster than screws.



Mobility

- The integrated carrying handle on the front of the machine enables easy loading and convenient transport.
- Push handle can be retracted at the push of a button.
- Compact package.



Flexibility

- Vertical and horizontal operation possible.
- The wheels are not on in horizontal operation. In this way, the machine offers maximum stability.
- Separate parking and transport position for the spray unit.

EQUIPMENT FOR HD 5/12 C PLUS

1.520-909.0



		Order no.	Description	
TRIGGER GUNS				
EASY!Force Advanced	1	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	■
Conversion kit 1 from high pressure hose	2	4.111-050.0	For retrofitting Kärcher high-pressure cleaners with existing high-pressure hose: EASY!Force conversion kit 1 with EASY!Force high-pressure gun, spray lance and all adapters through to the nozzle.	□
Conversion kit 2 from device	3	4.111-051.0	Developed for retrofitting existing high-pressure cleaners from Kärcher: EASY!Force conversion kit 2 with EASY!Force high-pressure gun, spray lance, high-pressure hose and necessary adapters.	□
SPRAY LANCES				
Rotating spray lances				
Spray lance, 840 mm, rotating, 840 mm, rotatable	4	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	■
LED nozzle light	5	2.680-002.0	Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours.	□
Spray lance, 250 mm, rotatable	6	4.112-027.0	Spray lance, 250 mm, rotatable, ergonomic	□
Spray lance, 400 mm, rotatable	7	4.112-024.0	Spray lance, 400 mm, rotatable, ergonomic	□
600 mm spray pipe, rotatable, 600 mm, rotatable	8	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
1050 mm spray pipe, rotatable, 1050 mm, rotatable	9	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
1550 mm spray pipe, rotatable, 1550 mm, rotatable	10	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
2050 mm spray pipe, rotatable, 2050 mm, rotatable	11	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance extender, 1000 mm	12	4.112-048.0		□
Angular spray lance				
Spray lance for toilets and rain gutters	13	4.112-029.0	Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	□
Flexible spray lance				
Flexible lance, 1050 mm	14	4.112-035.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	□

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HD 5/12 C PLUS

1.520-909.0



		Order no.	Description	
SPRAY LANCES				
Flexible spray lance				
High pressure articulated joint	15	4.112-057.0	For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	<input type="checkbox"/>
Undercarriage spray lance				
Underbody lance	16	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	<input type="checkbox"/>
Additional handle				
Additional handle for EASY!Lock spray lances	17	4.321-380.0	Comfortable in every situation – the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task. Regularly changing your posture relieves the strain on your body, making work more relaxed. Thanks to the 360°-rotatable spray lance, the additional handle can simply be fully rotated whilst working for greater flexibility.	<input type="checkbox"/>
PowerControl spray lance				
Pressure regulating jet pipe packaged Po	18	4.112-045.0	Infinitely variable pressure adjustment during operation directly in the operator's gripping area, especially for machines without servo control function. The cleaning performance can be adapted to the respective task in an instant. The low pressure mode for the application of the cleaning agent and the adjustment of the jet level round off the product.	<input type="checkbox"/>
ROTARY NOZZLES (DIRT BLASTERS)				
Dirt Blaster, small				
Dirt blaster, small, 035	19	4.114-019.0	The new performance dirt blaster (nozzle size 035) with rotating point jet makes a big difference: up to 50% higher cleaning and area performance than its predecessor.	<input checked="" type="checkbox"/>
Dirt blaster, large				
Dirt blaster, large, 035	20	4.114-040.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	<input type="checkbox"/>
MULTIPLE-JET NOZZLES				
Triple nozzles				
Triple nozzle, 038	21	4.117-032.0	Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For machines with an injector, the low-pressure flat stream is useful for cleaning agent suction and application.	<input checked="" type="checkbox"/>
WATER BLASTER HOSES				
Standard with unions on both sides				
High-pressure hose, 10 m, ID 6, 250 bar, 2 × EASY!Lock	22	6.110-034.0	10 m long high-pressure hose with EASY!Lock manual screw fitting on both sides. Nominal size DN 6, suitable up to 250 bar.	<input checked="" type="checkbox"/>
	23	6.110-035.0	10 m long high-pressure hose (DN 6) equipped with EASY!Lock manual screw fitting on both sides. Suitable up to 250 bar and with ANTI!Twist.	<input type="checkbox"/>
High-pressure hose, 10 m, ID 6, 300 bar, 2 × EASY!Lock	24	6.110-056.0	High-pressure hose (DN 6) equipped with ANTI!Twist and the new EASY!Lock manual screw fitting on both sides. For pressures up to 300 bar. 10 m long.	<input type="checkbox"/>
High-pressure hose, 10 m, ID 8, 315 bar, 2 × EASY!Lock	25	6.110-031.0	High-pressure hose (DN 8) suitable up to 315 bar pressure. With innovative EASY!Lock manual screw fitting on both sides, ANTI!Twist and 10 m long.	<input type="checkbox"/>
High-pressure hose, 15 m, ID 8, 315 bar, 2 × EASY!Lock	26	6.110-030.0	15 m long high-pressure hose, DN 8, with ANTI!Twist and time-saving EASY!Lock manual screw fitting on both sides.	<input type="checkbox"/>
High-pressure hose, 20 m, ID 8, 315 bar, 2 × EASY!Lock	27	6.110-032.0	20 m long high-pressure hose (DN 8) equipped with the time-saving and robust EASY!Lock manual screw fitting on both sides. Approved for pressures up to 315 bar.	<input type="checkbox"/>
High-pressure hose, 30 m, ID 8, 315 bar, 2 × EASY!Lock	28	6.110-014.0		<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HD 5/12 C PLUS

1.520-909.0



	Order no.	Description	
WATER BLASTER HOSES			
Standard with unions on both sides			
High-pressure hose, 15 m, ID 10, 220 bar, 2 × EASY!Lock	29 6.110-042.0		<input type="checkbox"/>
High-pressure hose, 25 m, ID 10, 220 bar, 2 × EASY!Lock	30 6.110-044.0	with union on both sides, M 22 × 1.5 with anti-kink protection. NW 10/155°C/220 bar	<input type="checkbox"/>
High-pressure hose, 40 m, ID 10, 220 bar, 2 × EASY!Lock	31 6.110-045.0		<input type="checkbox"/>
Longlife 400 with unions on both sides			
High-pressure hose Longlife, 1,5 m, ID 8, 400 bar, 2 × EASY!Lock	32 6.110-024.0	1,5 m high-pressure hose (DN 8, M 22 × 1,5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 × 1,5).	<input type="checkbox"/>
High-pressure hose Longlife, 1,5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1,5	33 6.110-069.0		<input type="checkbox"/>
High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	34 6.110-038.0	Durable, 10 m long high-pressure hose (DN 8) with double steel core and EASY!Lock manual screw fitting on both sides and ANTI!Twist. Approved for 400 bar pressure.	<input type="checkbox"/>
High-pressure hose Longlife, 30 m, ID 8, 400 bar, 2 × EASY!Lock	35 6.110-023.0	With rotary coupling, 2 × M 22 × 1,5	<input type="checkbox"/>
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	36 6.110-027.0	High-pressure hose with ANTI!Twist, EASY!Lock manual screw fittings and double steel core. 20 m long, nominal size DN 8, EASY!Lock manual screw fitting on both sides.	<input type="checkbox"/>
Food industry version with unions on both sides			
High-pressure hose food grade, 15 m, ID 6, 250 bar, 2 × EASY!Lock	37 6.110-063.0	15 m high-pressure hose (DN 6) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. DN 6/155°C/250 bar.	<input type="checkbox"/>
Longlife food design with screw connections at both ends			
High-pressure hose food grade Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	38 6.110-054.0	Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With patented AVS connection in the pistol (pivot mounted)	<input type="checkbox"/>
KÄRCHER POWER NOZZLE			
HP nozzle spray angle 0°			
Power nozzle 0°, 040	39 2.113-001.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.	<input type="checkbox"/>
Power nozzle spray angle 15°			
Power nozzle . 038	40 2.113-044.0	Flat jet nozzle for stubborn dirt.	<input type="checkbox"/>
Power nozzle spray angle 25°			
Power nozzle 25°, 038	41 2.113-006.0	Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	<input type="checkbox"/>
Power nozzle spray angle 40°			
Power nozzle 40°, 040	42 2.113-003.0	Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	<input type="checkbox"/>

Available accessories.

EQUIPMENT FOR HD 5/12 C PLUS

1.520-909.0



		Order no.	Description	
ECO!BOOSTER				
eco!Booster TR 040	43	2.113-086.0	eco!Booster with 50% higher area performance than the Kärcher power nozzle; ideal for delicate surfaces. For cold and hot water high-pressure cleaners (nozzle size 040).	<input type="checkbox"/>
QUICK CONNECT				
Quick coupling	44	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 x 1.5 internal thread.	<input type="checkbox"/>
Male coupling	45	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 x 1.5 external thread.	<input type="checkbox"/>
DRUM AND TANK CLEANING				
Add-on kit mud sucker	46	2.641-798.0	For connection to the high-pressure hose of Kärcher high-pressure cleaners: Powerful sludge suction cleaner for the retrofitting of high-pressure cleaners to dirt pumps.	<input type="checkbox"/>
DICHTUNGEN FÜR TR-GEWINDE				
Spare part set seals TR	47	2.880-001.0		<input type="checkbox"/>
STEAM NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE				
Rollover nozzle holder				
Rollover nozzle holder	48	4.764-012.0	Rollover nozzle holder for contactless changeover from pencil jet to fan jet as well as low-pressure detergent injection via knurled nut. Without nozzle insert. (Additional type-specific power nozzle).	<input type="checkbox"/>
NOZZLE UNION / SPACER				
Nozzle union				
Protection part TR only for replacement	49	4.112-011.0		<input type="checkbox"/>
PIPE CLEANING				
Pipe cleaning hose, ID 6				
Hose assembly TR pipe cleaning DN6 max.2	50	6.110-046.0	The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning hose, NW 6, 20 m, 250 bar	51	6.110-008.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Hose assembly TR pipe cleaning DN6 max.2	52	6.110-047.0	The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning nozzle				
Dirt blaster pipe cleaning D21/040	53	4.765-001.0	The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	<input type="checkbox"/>
Dirt blaster pipe cleaning D30/040	54	4.765-004.0		<input type="checkbox"/>
Pipe cleaning nozzle	55	5.763-015.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>
	56	5.763-020.0		<input type="checkbox"/>

Available accessories.

EQUIPMENT FOR HD 5/12 C PLUS

1.520-909.0



		Order no.	Description	
PIPE CLEANING				
Pipe cleaning nozzle				
Pipe cleaning nozzle	57	5.763-017.0	Pipe cleaning nozzle with inner thread. Different spray directions. The hose moves freely through the pipe. (R 1/8" connection, 3 × 30° backwards, diameter 30 mm.)	<input type="checkbox"/>
Rotating pipe cleaning nozzle	58	6.415-428.0	Pipe cleaning nozzle with four rotating jets and inner thread. Different spray directions. The hose moves freely through the pipe. With R 1/8" connection.	<input type="checkbox"/>
FLOOR AND HARD SURFACE CLEANER				
FR Classic surface cleaner				
FR Classic surface cleaner	59	2.111-016.0	The ideal entry-level model in the Kärcher surface cleaner range for cleaning surfaces indoors and outdoors. With splash guard and up to 150 bar working pressure.	<input type="checkbox"/>
Hard Surface Cleaner FRV 30				
FRV 30 Surface Cleaner	60	2.111-010.0	With the integrated, automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient and can be used in both inside and outside areas. There is no longer a need to rinse the surface after cleaning, since the dirty water can be discharged through the 5 m suction hose supplied. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1000 l/h / 60°C.	<input type="checkbox"/>
Rubber lip for FRV 30	61	2.642-910.0	For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.	<input type="checkbox"/>
Extension hose 5 m	62	4.440-939.0	5m extension hose for FRV 30. Connection sleeve included.	<input type="checkbox"/>
ABS hose fastening	63	2.642-528.0		<input type="checkbox"/>
ABS dirt trap	64	2.642-532.0		<input type="checkbox"/>
Hard surface cleaner FR 30				
FR 30 Surface Cleaner	65	2.111-011.0	Up to 10 times greater area performance compared with the conventional high-pressure jet. Plastic casing for optimal manoeuvrability, double ceramic bearing for long working times, flexible connection joint for optimal handling and integrated parking position. Machine-specific nozzle kit must be ordered separately. Max. 180 bar / 850 l/h / 60°C.	<input type="checkbox"/>
FR 30 Me surface cleaner				
Hard Surface Cleaner FR 30 Me	66	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	<input type="checkbox"/>
Machine-specific nozzle kits for FR				
Nozzle kit for FR, 450 l/h - 500 l/h	67	2.640-482.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (450 to 500 l/h).	<input type="checkbox"/>
Machine-specific nozzle kits for FRV				
Nozzle kit for FRV, 035	68	2.642-430.0	Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.	<input type="checkbox"/>
Machine-specific nozzle kits for FR Classic				
Nozzle kit for FR Classic, 034	69	2.885-313.0	Nozzle kit specifically for FR Classic surface cleaner.	<input type="checkbox"/>
FRV 30 Me surface cleaner				
FRV 30 Me Surface Cleaner	70	2.111-012.0	Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.	<input type="checkbox"/>

Available accessories.

EQUIPMENT FOR HD 5/12 C PLUS

1.520-909.0



	Order no.	Description	
FLOOR AND HARD SURFACE CLEANER			
FRV 30 Me surface cleaner			
FRV 30 Me extension hose	71	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter. <input type="checkbox"/>
FOAM SYSTEMS			
Cup foam lance			
Cup foam lance Advanced 1, 400 l/h - 600 l/h	72	4.112-063.0	<input type="checkbox"/>
Cup foam lance DUO Advanced 1, 400 l/h - 600 l/h	73	4.112-067.0	Nozzle kit specifically for FR Classic surface cleaner. <input type="checkbox"/>
Cup foam lance Basic 1, 350 l/h - 600 l/h	74	4.112-053.0	For high-pressure cleaners with a flow rate of 350-600 l/h: new, robust and very high-quality Basic 1 cup foam lance with outstanding foam quality while consuming half as much cleaning agent. <input type="checkbox"/>
1-litre cleaning agent container for cup foam lance basic	75	5.071-414.0	<input type="checkbox"/>
1-litre cleaning agent container for cup foam lance advanced	76	6.414-050.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0). <input type="checkbox"/>
Inno Foam Kit			
Inno Foam Set with detergent injector	77	2.112-000.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection. <input type="checkbox"/>
Easy Foam Set			
Easy Foam Set with RM injector	78	2.112-010.0	HP foam system for use with HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately. <input type="checkbox"/>
Nozzle kits for Inno/Easy Foam Set			
Nozzle kit 055 for Inno / Easy Set 500-600 l/h	79	2.111-009.0	Optimal adaptation to different machine outputs for economic use. <input type="checkbox"/>
MIXERS AND INJECTORS			
Cleaning agent injector			
Cleaning agent injector for high and low pressure (without nozzles)	80	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%. <input type="checkbox"/>
Nozzle insert with order no. 3.637-001.0			
Nozzle insert with order no. 3.637-001.0, high pressure for machines up to 1,100 l/h	81	4.769-003.0	Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For water blasters with a water flow rate up to 1100 l/h. <input type="checkbox"/>
Nozzle insert with order no. 3.637-001, low pressure for devices up to 1,100 l/h	82	4.769-001.0	For low pressure with machines up to 1.100 l/h <input type="checkbox"/>
COUPLING PARTS			
Rotary coupling			
Rotary coupling	83	4.111-021.0	Kärcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector Easy!Lock. With grip protection. <input type="checkbox"/>
Connector			
Nozzle screws / screw socket	84	4.111-022.0	For attaching high-pressure nozzles and accessory parts to the HD trigger gun (with nozzle screws) - 1 × M 22 × 1.5/1 × M 18 × 1.5. <input type="checkbox"/>

Available accessories.

EQUIPMENT FOR HD 5/12 C PLUS 1.520-909.0



	Order no.	Description	
COUPLING PARTS			
Connector			
Y distributor	85	4.111-024.0	<input type="checkbox"/>
Short spray unit	86	4.111-038.0	For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles. <input type="checkbox"/>
Adapter EASY!Lock			
Adapter 1 M22AG-TR22AG	87	4.111-029.0	Adapter 1 to connect the old hose with the new hose <input type="checkbox"/>
Adapter 2 M22IG-TR22AG	88	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose <input type="checkbox"/>
Adapter 3 M22IG-TR22AG	89	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator <input type="checkbox"/>
Adapter 4 TR22IG-D11	90	4.111-032.0	Adapter 4 to connect the new gun with the old swivel hose <input type="checkbox"/>
Adapter 5 TR22IG-M22AG	91	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance <input type="checkbox"/>
Adapter 6 TR22IG-M22AG	92	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun <input type="checkbox"/>
Adapter 7 M18IG-TR20AG	93	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle <input type="checkbox"/>
Adapter 8 TR20IG-M18AG	94	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle <input type="checkbox"/>
Adapter hose extension 9 TR	95	4.111-037.0	Adapter 9 to connect the new hose with the new hose <input type="checkbox"/>
ADAPTER for replacement TR22IG-M22AG Er	96	4.111-046.0	Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection <input type="checkbox"/>
HOSE REELS			
Automatic, self-winding hose reels for wall mounting			
Automatic hose reel, powder-coated steel / plastic, 20 m	97	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic. <input type="checkbox"/>
Automatic hose reel, coated, 20 m	98	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose. <input type="checkbox"/>

Available accessories.

EQUIPMENT FOR HD 5/12 C PLUS

1.520-909.0




	Order no.	Description		
HOSE REELS				
Automatic, self-winding hose reels for wall mounting				
Automatic hose reel, stainless steel, includes swivel holder, 20 m	99	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Automatic stainless steel hose reel, 40 m	100	6.392-442.0		<input type="checkbox"/>
Powder-coated swivel holder	101	2.639-931.0	Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	<input type="checkbox"/>
Stainless steel swivel holder	102	2.641-867.0	Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	<input type="checkbox"/>
FACADE AND SOLAR PANEL CLEANING				
Brushes				
Drive for roller brush 500	103	4.762-584.0	Hydraulic drive for rotating roller brushes. For cleaning façades or solar power installations with our professional high-pressure cleaners. Installation on spray lance or telescopic lance.	<input type="checkbox"/>
Splash guard for roller brush 500	104	4.762-621.0	Splash guard with velcro fastening for rotating roller brush. Clear view of the brush thanks to transparent film, with protection against splashes at the same time.	<input type="checkbox"/>
Roller brush 500 soft	105	4.762-623.0	Soft brush attachment for use with hydraulic drive (4.762-584.0). Ideal for glass and solar power installation cleaning. Easy quick-change system and secure mounting on drive.	<input type="checkbox"/>
Roller brush 500 medium	106	4.762-624.0	Medium-hard brush attachment for use with hydraulic drive (4.762-584.0). Suitable for sensitive façades, foils and fabrics. Easy and safe quick-change system.	<input type="checkbox"/>
Roller brush 500 hard	107	4.762-625.0	Hard brush attachment for use with hydraulic drive (4.762-584.0). For rough façades, stone and wooden patios. Safe and easy quick-change system.	<input type="checkbox"/>
Brush hard	108	6.960-133.0	Brush with hard bristles for cleaning industry façades and floor coverings and removing coarse dirt. Simple installation on telescopic lances or high-pressure lances from Kärcher.	<input type="checkbox"/>
Brush medium	109	6.960-134.0	Optimally cleans façades, roller shutters and textile fabrics: the brush with medium-hard bristles for fast and simple attachment to telescopic lances or high-pressure lances from Kärcher.	<input type="checkbox"/>
Brush soft	110	6.960-135.0	For simple installation on telescopic lances or high-pressure lances from Kärcher: brush with soft bristles for deep cleaning of sensitive surfaces such as glass or solar systems.	<input type="checkbox"/>
Teleskopstangen				
TL low pressure adapter	111	4.580-097.0	TL low-pressure adapter comprising ball valve for tool-free installation on telescopic lances. Ideal for applications with rotating high-pressure brushes.	<input type="checkbox"/>
Telescopic lance TL 7 F	112	4.762-609.0	Telescopic lance TL 7 F with up to 7 m reach made from robust and lightweight glass fibre. With practical quick-release fasteners for simple retraction and extension.	<input type="checkbox"/>

Available accessories.

EQUIPMENT FOR HD 5/12 C PLUS

1.520-909.0

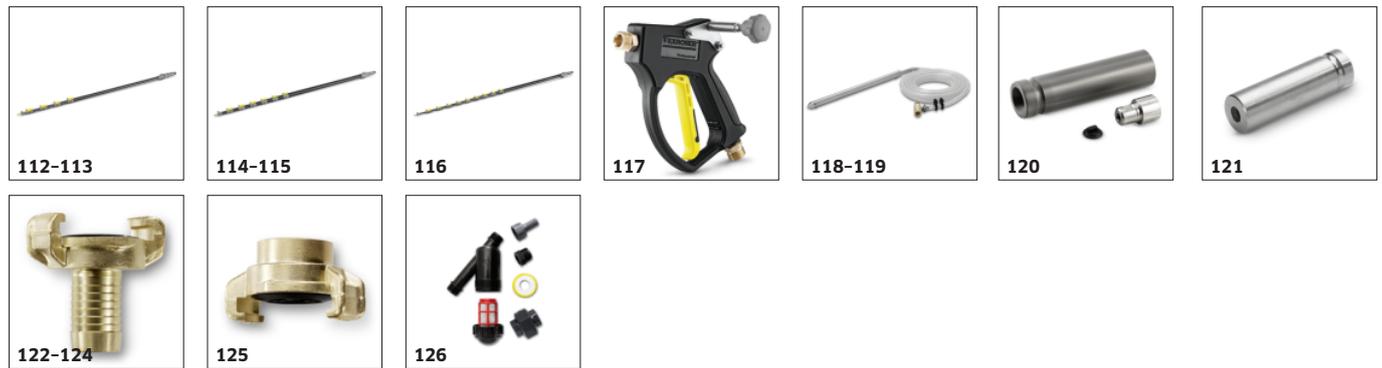

		Order no.	Description	
FACADE AND SOLAR PANEL CLEANING				
Teleskopstangen				
Telescopic lance TL 7 H	113	4.762-610.0	Multifunctional hybrid telescopic lance TL 7 H made of rigid and lightweight carbon-glass fibre mix. Telescopic thanks to quick-release fastenings. Up to 7 m reach.	<input type="checkbox"/>
Telescopic lance TL 10 H	114	4.762-611.0	Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners.	<input type="checkbox"/>
Telescopic lance TL 10 C	115	4.762-612.0	Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels.	<input type="checkbox"/>
Telescopic lance TL 14 C	116	4.762-613.0	Maximum rigidity with minimum weight: telescopic lance TL 14 C made from carbon fibre. Enormous reach of 14 m, multifunctional use and easy to use thanks to quick-release fasteners.	<input type="checkbox"/>
TL high pressure adapter	117	4.775-154.0	TL high-pressure adapter, flexible high-pressure gun for high-pressure cleaning with telescopic lances. Ergonomic, easy to install, suitable for right- and left-handed individuals.	<input type="checkbox"/>
WET BLASTING ATTACHMENT				
Wet blasting attachment (without nozzle)				
Wet blasting attachment with flow control (without nozzles)	118	4.115-000.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	<input type="checkbox"/>
Wet blasting attachment without flow control (nozzles not included)	119	4.115-006.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	<input type="checkbox"/>
Nozzle kits for wet jet unit				
Nozzle pack TR wet jet set 0035	120	2.112-021.0		<input type="checkbox"/>
Boron carbide nozzle				
Boron carbide nozzle, for machines up to 1,000 l/h	121	6.415-084.0	In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	<input type="checkbox"/>
WATER CONNECTION				
Geka coupling				
Geka connector with hose barb, R 1/2"	122	6.388-461.0	with hose liner	<input type="checkbox"/>
Geka connector with hose barb, R 3/4"	123	6.388-455.0		<input type="checkbox"/>
Geka connector with hose barb, R 1"	124	6.388-465.0		<input type="checkbox"/>
Geka connector with inner thread, R 3/4"	125	6.388-473.0	with female thread	<input type="checkbox"/>
Water fine filter				
Water fine filter, with adapter	126	4.730-102.0	Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the water blaster from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	<input type="checkbox"/>

Available accessories.

EQUIPMENT FOR HD 5/12 C PLUS 1.520-909.0



		Order no.	Description	
WATER CONNECTION				
Water supply hose				
Water supply hose	127	4.440-038.0	NW 13 R1" / R 3/4", up to 30 °C	<input type="checkbox"/>
WASHING BRUSHES				
Push-on washing brush				
Push-on wash brush	128	4.113-001.0	For universal use for surface cleaning. Mounted using clamp directly at the spray lance. TR thread connection	<input type="checkbox"/>
	129	4.762-497.0	The wash brush is fitted directly onto the devices' new dual and triple nozzles using clamping.	<input type="checkbox"/>
Rotating washing brush				
Rotating wash brush for < 800 l/h machines, nylon bristles	130	4.113-004.0	The rotating wash brush gently removes fine dust and grime from all surfaces. Heat-resistant up to 80°C. (M 18 × 1.5, replaceable brush insert).	<input type="checkbox"/>
Rotating wash brush for < 800 l/h machines, natural hair bristles	131	4.113-003.0	Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 × 1.5 (replaceable brush insert).	<input type="checkbox"/>

Available accessories.