

DuraLed®



Class leading efficiency offering a wide spread of light.



Riviera 43FB www.riviera.com.au

Compact DuraLed® 12 LED lamps feature ultra efficient power saving LED technology with an wide spread of light.


Completely sealed, these robust and compact lamps are suitable for a wide range of interior or exterior applications, wet or dry. Power consumption is very low at less than 2.5W (less than 0.20A @ 12V) yet light performance is an impressive wide spread, comparable to an 8W fluorescent tube lamp.

DuraLed® lamps are built around a heavy duty 'high impact' acrylic lens with precision machined optic patterns to disperse light with the wide spread. The lamps are ideal for engine room illumination, under decks, and to throw light into confined spaces and cavities on a wide range of vessels.

A robust bush mount system secures the surface mount lamp and takes up the torque loads of fastenings. Once the heavy duty nylon cover is snapped into place, no fastenings are visible.



Switched versions feature a heavy duty and completely sealed push ON, push OFF switch in the centre of the lamp.

DuraLed® lamps are purpose designed for harsh environments and represent the latest in class leading energy efficiency and maintenance free 'fit and forget' technology.

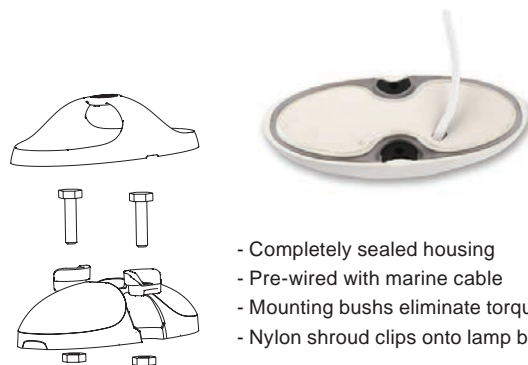

- Completely sealed housing
- Pre-wired with marine cable
- Mounting bushes eliminate torque loads
- Nylon shroud clips onto lamp body

DuraLed® 12 LED Candela and Lux performance. White light.

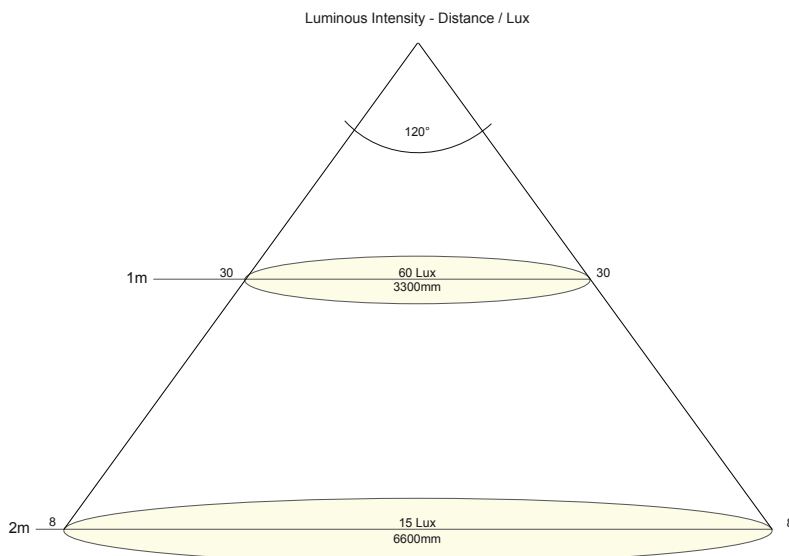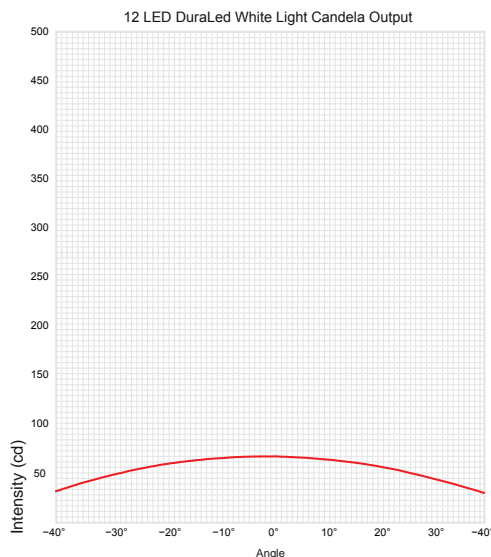


Multi-purpose LED lamps offering class leading efficiency and durability



Lens Material	UV resistant, enhanced impact acrylic
Shroud Material	Heavy duty nylon
Colour Temperature	5000K (White) / 3000K (Warm White)
Cable	Pre-wired with 500mm of twin core marine cable
Operating Voltage	12/24V DC
Power Consumption	< 2.5W (< 0.20A @ 12V / < 0.10A @ 24V)
Operating Temperature	-40°C to +60°C / -40°F to 140°F
Degree of Protection	IP 67 - Completely Sealed
Weight	115g (including cable)
Installation	Surface mount with robust bush mount
Approvals	CE, ISO 8846 (Ignition Protection)



Packaging for aftermarket presentation

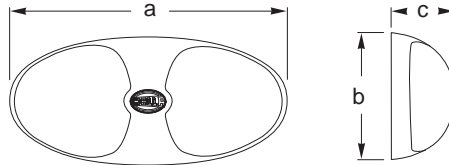

Dimensions
 a = 140 mm / 5.51"
 b = 65.0 mm / 2.56"
 c = 32.0 mm / 1.26"

DuraLed®

9700 Series



White Light DuraLed® 12 LED Lamps

Voltage	Shroud Colour	Part Number
12/24V DC	White Shroud	2JA 959 700-101
12/24V DC	Black Shroud	2JA 959 700-121



Warm White Light DuraLed® 12 LED Lamps

Voltage	Shroud Colour	Part Number
12/24V DC	White Shroud	2JA 959 700-701
12/24V DC	Black Shroud	2JA 959 700-711



0704 Series with Heavy Duty Switch



White Light DuraLed® 12 LED Lamps

Voltage	Shroud Colour	Part Number
12/24V DC	White Shroud with switch	2JA 980 704-001
12/24V DC	Black Shroud with switch	2JA 980 704-021



Warm White Light DuraLed® 12 LED Lamps

Voltage	Shroud Colour	Part Number
12/24V DC	White Shroud with switch	2JA 980 704-501
12/24V DC	Black Shroud with switch	2JA 980 704-521

