

Data Sheet for Article: ISA05295-A


# HRC-fuse-switch ARROW BLUE size 3, 3-pole, M10



## Technical Data

Power loss (W)	51,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	55
Size type	NH 3
Rated operational voltage (V)	690
Rated operational current (A)	630
Rated frequency (Hz)	50/60
Rated insulation voltage [Ui] (V)	1000
Rated conditional short-circuit-current	120
Rated impulse withstand voltage [Uimp] (V)	8
Poles	3
Connection	Screw-terminal
IP Rating	IP2XC

**Dimensioned drawing: HRC-fuse-switch ARROW BLUE size 3, 3-pole, M10**

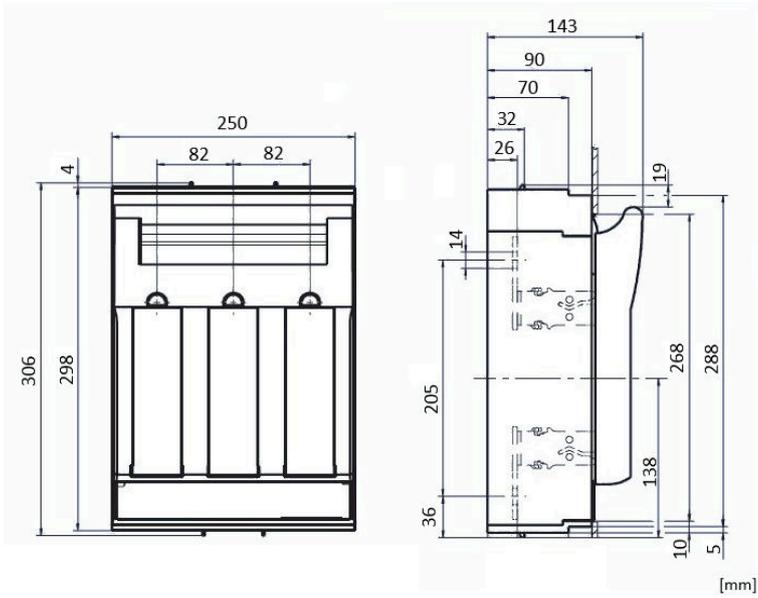

## Article Table

DESCRIPTION	Order No.
HRC-fuse-switch ARROW BLUE size 3, 3-pole, M10	ISA05295-A
<b>Optional Accessories</b>	
Boxterminal ARROW BLUE size 2 and size 3 max. clamping range: 95-300mm <sup>2</sup> Al/Cu	ISA05745-A
Cover support top/bottom 60 and 70mm for ARROW BLUE size 1-3 ARROW BLUE	ISA05721-A
HRC fuse element, size 3, 200A, 400VAC	ISP03200
HRC fuse element, size 3, 250A, 400VAC	ISP03250
HRC fuse element, size 3, 315A, 400VAC	ISP03315
HRC fuse element, size 3, 400A, 400VAC	ISP03400
HRC fuse element, size 3, 500A, 400VAC	ISP03500
HRC fuse element, size 3, 630A, 400VAC	ISP03630