


Universal-Amp Turn On/Off Timer

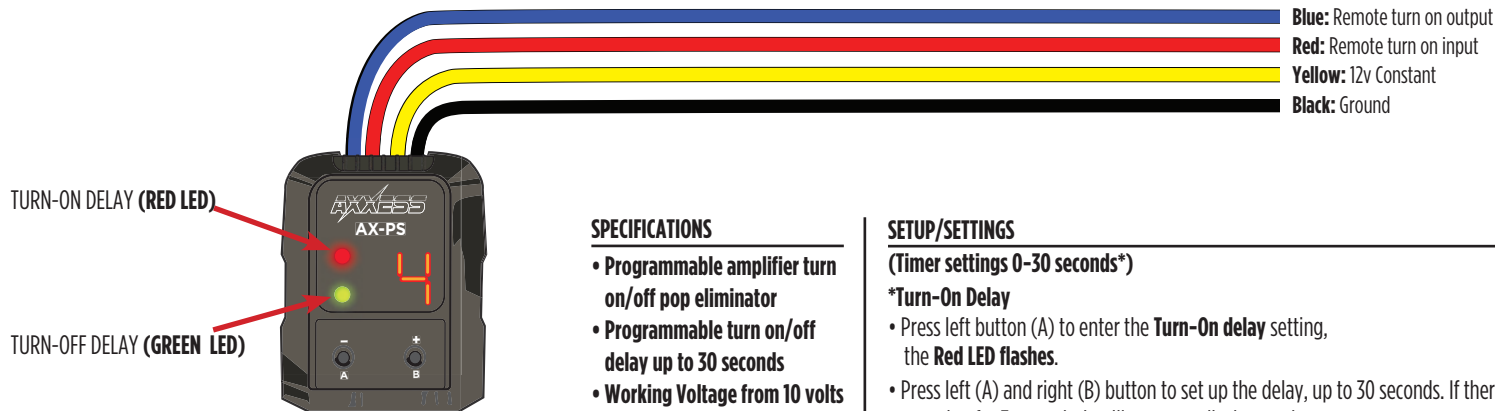

INTERFACE COMPONENTS

- AX-PS Timer with wiring harness

TOOLS & INSTALLATION ACCESSORIES REQUIRED

- Crimping tool and connectors, or solder gun, solder, and heat shrink
- Tape
- Wire cutter
- Zip-ties

SPECIFICATIONS

- Programmable amplifier turn on/off pop eliminator
- Programmable turn on/off delay up to 30 seconds
- Working Voltage from 10 volts to 16 volts
- Trigger output current: 500mA
- Trigger input current: 1mA
- 4-wire installation

SETUP/SETTINGS

(Timer settings 0-30 seconds*)

*Turn-On Delay

- Press left button (A) to enter the **Turn-On delay** setting, the **Red LED flashes**.
- Press left (A) and right (B) button to set up the delay, up to 30 seconds. If there is no action for 3 seconds, it will return to display mode.

*Turn-Off Delay

- Press right button (B) to enter into **Turn-Off Delay** setting, the **Green LED flashes**.
- Press left (A) and right (B) button to set up the delay up to 30 seconds. If there is no action for 3 seconds, it will return to display mode.

Note: Display will turn off after 3 minutes on inactivity. To turn on the display press either the A or B button



AX-PS INSTALLATION INSTRUCTIONS

Having difficulties? We're here to help.



Contact our Tech Support line at:

386-257-1187



Or via email at:

techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 5:00 PM

Sunday: 10:00 AM - 4:00 PM



**Metra recommends MECP
certified technicians**