

Selector® 3777 MkII Dual Entry Locks



Description

Designed to enable third parties such as emergency services to enter specific areas by second cylinder; without giving access to all locksets in the building and the ability to lockout keys with restricted access at certain times.

Product Details

Furniture

Select from Lockwood 1800, 2800 or Artefact Series II ranges. Refer to lockweb.com.au for further details.



Standard Finishes

Stainless Steel (SS)
Other finishes available via finish kit conversions

Note:

The Selector 3770 MkII Series has a new Lower Cylinder Mounting Kit (3777-KIT) which can hold the 570E, 577 and 10,000 cylinders. For Selector 3770 MkI Series mortice locks, the 3777M1-KIT570E or 3777M1-KIT577 Lower Cylinder Mounting Kit must be ordered.

Selector® 3777 MkII Dual Entry Locks

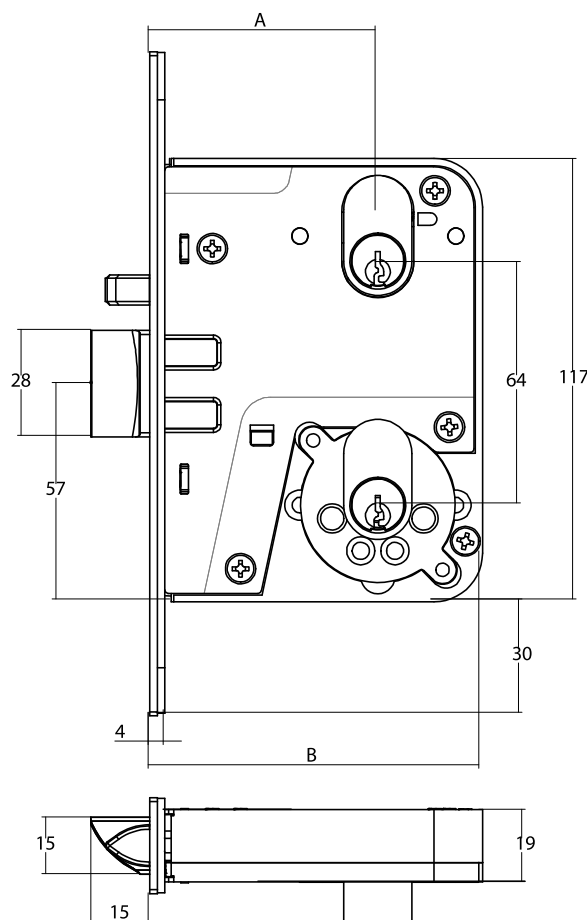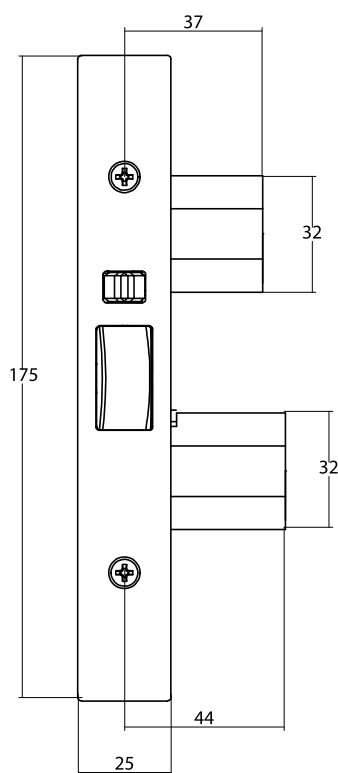


Selector® 3777 Dual Entry Locks

Part Number	3777	4777	5777
Dimension A	60	89	127
Dimension B	88	117	155

Note: Order by specifying 3772SS primary lock and 3777-KIT Dual Entry Kit. Cylinders must be ordered separately.

The Selector 3770 MkII Series has a new Lower Cylinder Mounting Kit (3777-KIT) which can hold the 570E, 577 and 10,000 cylinders. For Selector 3770 MkI Series mortice locks, the 3777M1-KIT570E or 3777M1-KIT577 Lower Cylinder Mounting Kit must be ordered.

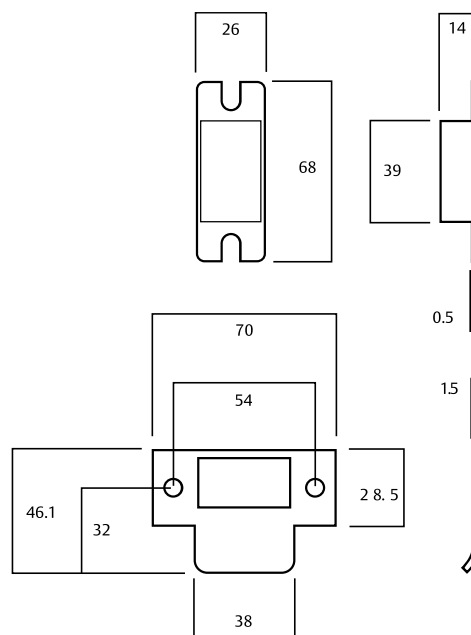

Selector® 3777 MkII Dual Entry Locks


Dual Entry Lock

Part Number 3777X-

Two cylinders outside.

Outside: Opened by key. Cylinders are keyed to differ.

Inside: Opened by handle at all times.




Dual Entry Lock with Lower Cylinder Lockout

Part Number 3777V-

Two cylinders outside.

Outside: Opened by key when unlocked. Upper cylinder key locks or unlocks lower cylinder and retracts bolt after unlocking lock. Cylinders are keyed to differ.

Inside: Opened by handle at all times.



Notes:

All drawings shown are in right hand configuration. Part numbers shown above are for 60mm backset lock, if 89mm is required substitute 3 for 4 i.e. 4777, or if 127mm lock is required, substitute 3 for 5 i.e. 5777

*Anti-lockout - Closing the door or retracting latch bolt unlocks the lock, preventing lockout situations.

Legend

Hub Setting



Lock Function Setting



Cam or Adaptor

