



PRODUCT FEATURES:

- 31.8mm diameter
- Concealed fixing
- Suits hospital WC en suite
- All dimensions centre to centre
- Standard - 600mm x 600mm at 90° (underslung)
- For special sizes nominate:
Horizontal (A) =
Vertical (B) =

PRODUCT DATA:

CONSTRUCTION:

FLANGES: Fabricated of type 304 (18-8), dia. 13 gauge stainless steel.

ESCUTCHEONS: Fabricated of type 304 (18-8), 22 gauge stainless steel. One-piece drawn construction with exposed surfaces in architectural bright polished finish.

TUBING: Fabricated of type 304 (18-8), 32mm (1-1/4") O.D. 18 gauge stainless steel, seamless construction with exposed surfaces in architectural bright polished finish. Bent ends of tubing pass through the flanges and are heliarc welded into a single structural unit for maximum strength. Intermediate supports are contour cut and joined by heliarc welding to form an integral part of the grab bar. All welds ground and polished to blend. Mandrel bending process maintains uniform bar diameter.

STRENGTH:




When properly mounted, all Bradley heavy duty grab bar systems meet or exceed the requirements of Australian Standard AS1428.1(2,3), of ANSI Standard A117.1, the ADA and ABA Accessibility Guidelines for Buildings and Facilities (ADAAG) and the Uniform Federal Accessibility Standard (UFAS).

INSTALLATION:

Secure to wall where adequate in-wall backing exists. Use bar as template to locate mounting holes. Drill holes and set anchors as appropriate. Mount grab rail and secure mounting screws. Snap escutcheons into place.

GUIDE SPECIFICATION:

Grab bar shall be fabricated of type 304 bright polished finish stainless steel with concealed mounting flanges in sizes and configurations as indicated.

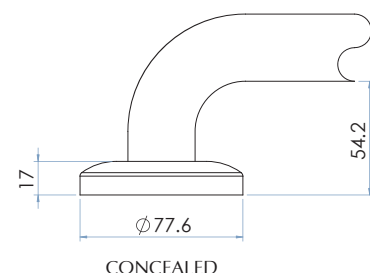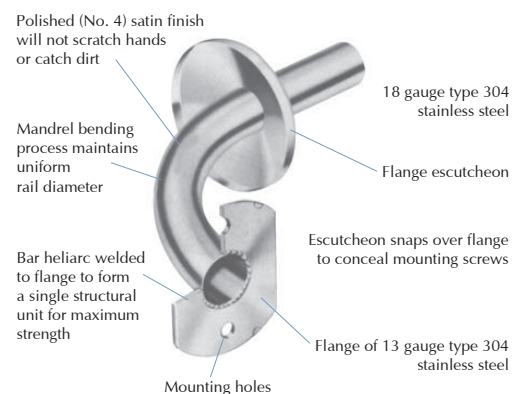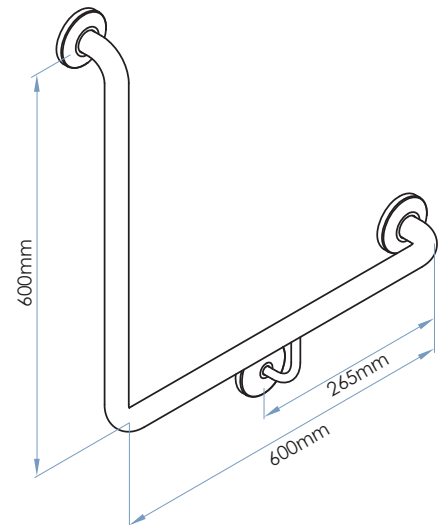

*50-60mm wall clearance required under most building design codes