


Catalogue number: **CVS EUR**□□□□/□□
CVS EUR□□□□/□□-OR



CVS Eureka IP55 Mild Steel Free Standing Enclosures



- AS/NZS 61439.1
- Color Options: RAL 7035 grey, X15 Orange
- IP55 Mild Steel Enclosures
- Enclosure heights from 1600mm to 2000mm
- Enclosure depth 300/400mm
- Rigid Construction
- High resistance to impact
- C-Rails welded on the internal body for mounting accessories
- Complete with 3.0mm mounting plates and Black Plinth
- Built for IEC 60529 standards
- Both the mounting plate and the inner door is adjustable via side mounting rails

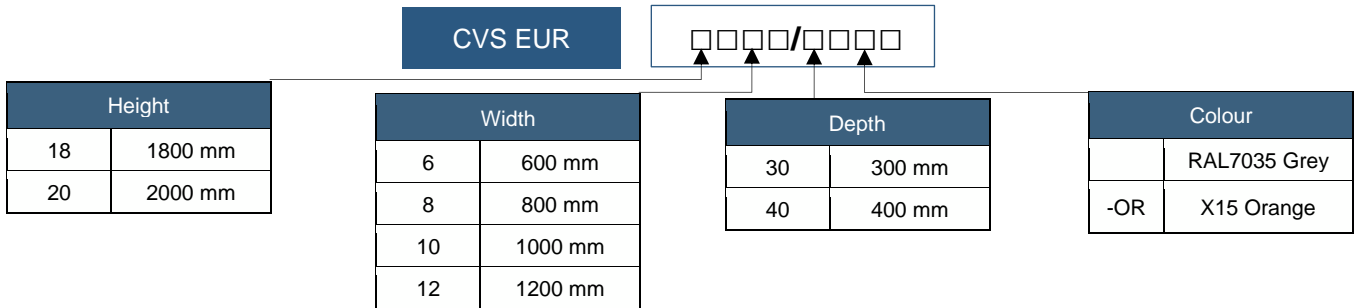


Properties

Properties	
Manufacturer	CVS
Product Range	Eureka IP55 Mild Steel Floor Standing Enclosures
IP rating	IP55
Enclosure Material	Polyester Powder coated Mild Steel
Enclosure Thickness	2.0mm
Available Colours	RAL7035 Grey, X15 Orange
Operating Temperature	Resistant to High temperatures
Resistance to chemicals	Resistant to chemical attacks
Impact resistance	High resistance to Impact
Earthing	Studs available on body, door, and mounting plate
EMC shielding	Blockage of electromagnetic signals (Mild Steel)
Mounting Plate	3mm Thick Mounting Plate with adjustable depth
Cable Entry	Top entry- 2mm Mild Steel Polyester Powder Coated Gland Plate
Standards	Built to IEC 529 standards




CVS Eureka IP55 Mild Steel Free Standing Enclosures

Dimensions for EUR CVS 186/30 to 206/30

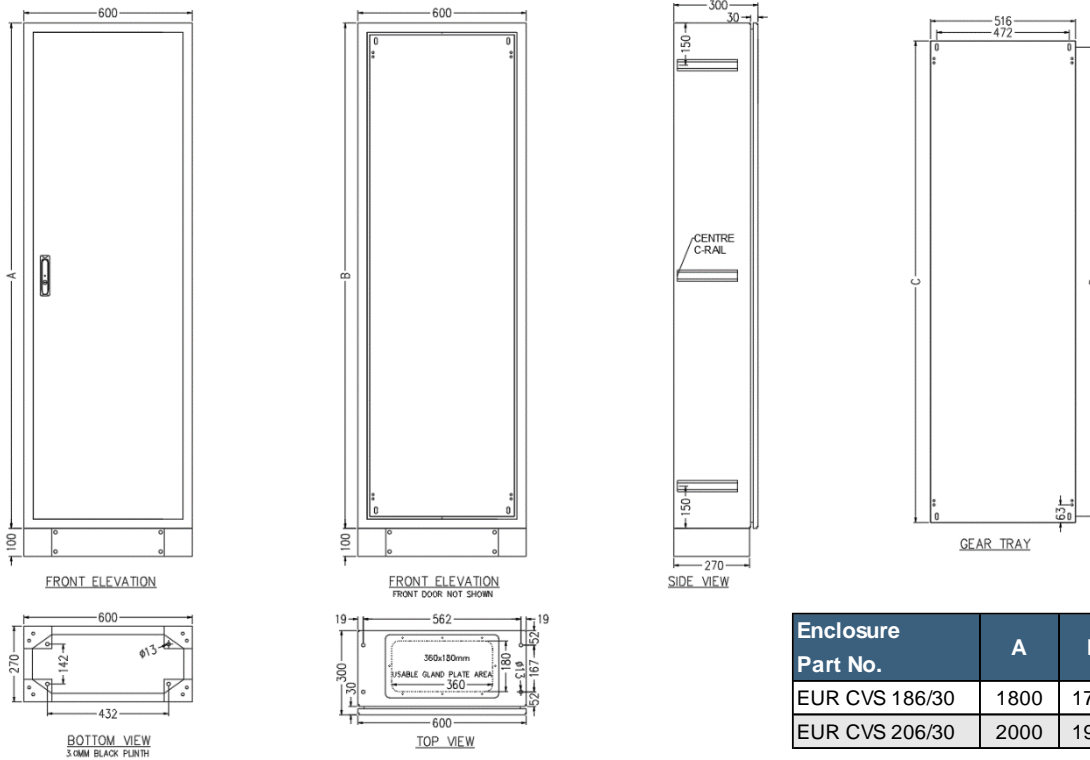


Dimensions for EUR CVS 168 to 2080

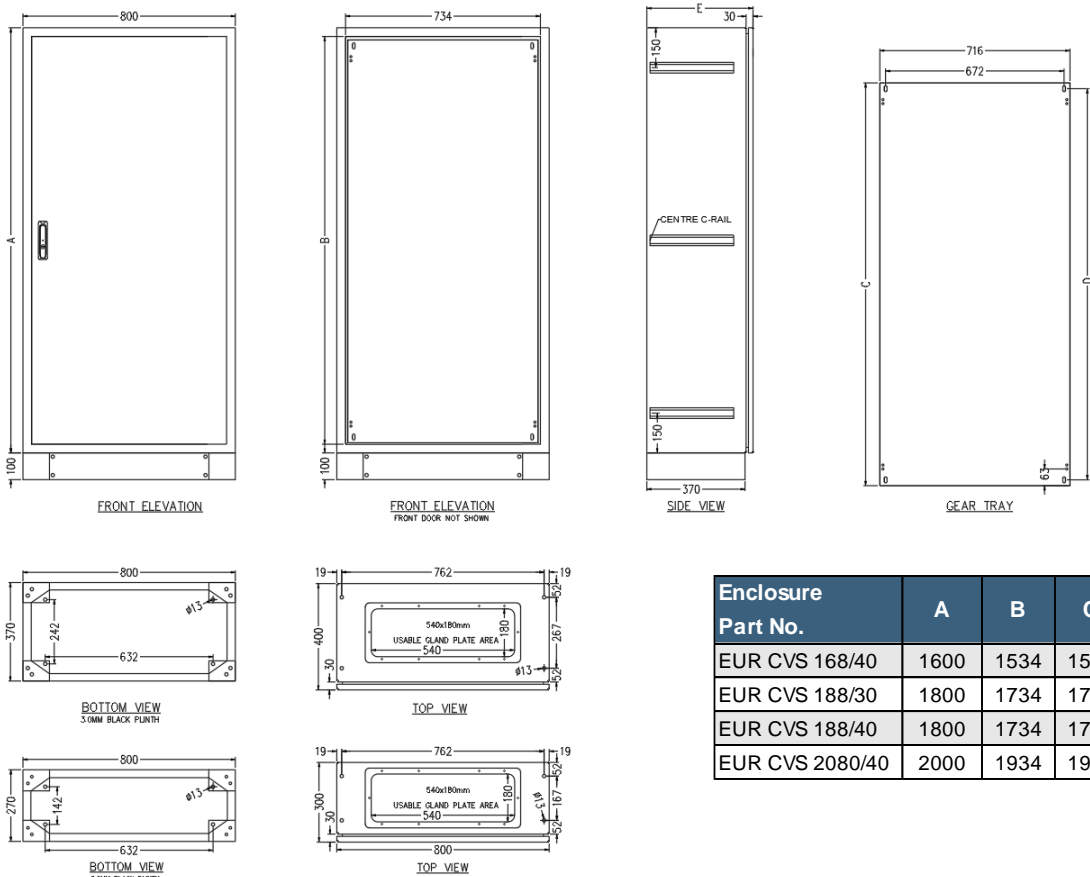


CVS Eureka IP55 Mild Steel Free Standing Enclosures

Dimensions for EUR CVS 1810 & 2010

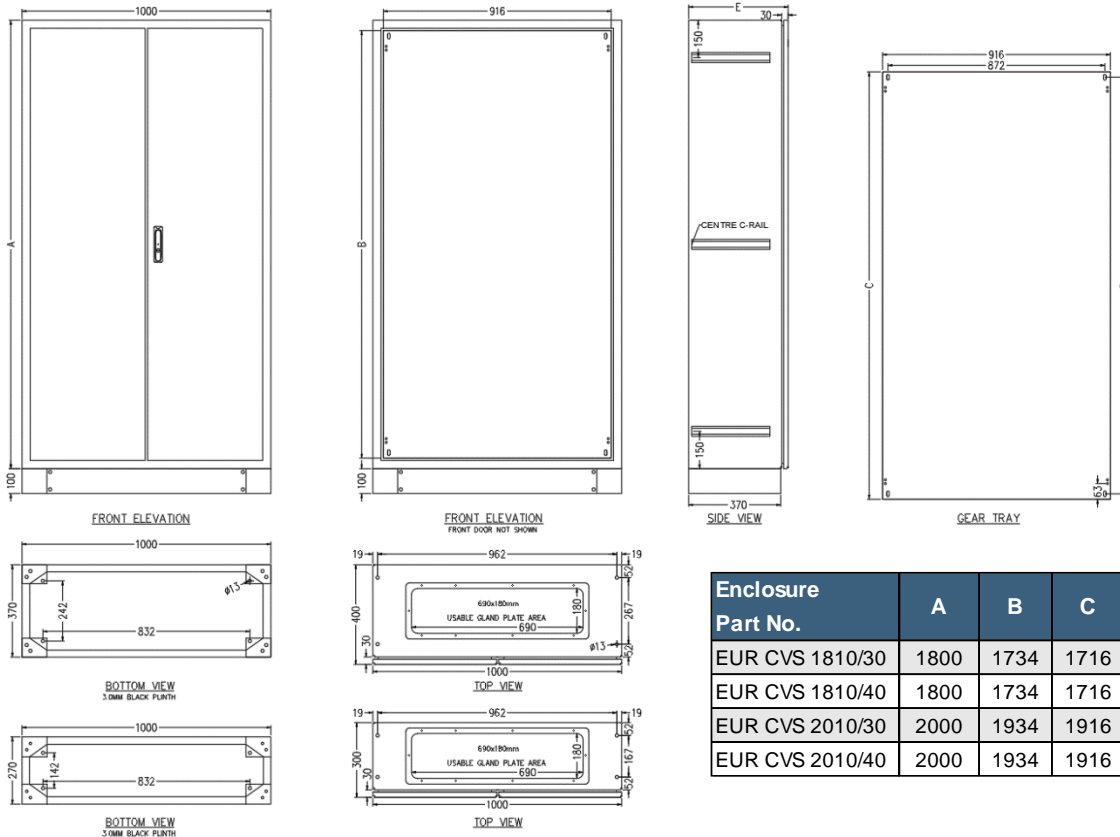

Enclosure Part No.	A	B	C	D	E
EUR CVS 1810/30	1800	1734	1716	1672	300
EUR CVS 1810/40	1800	1734	1716	1672	400
EUR CVS 2010/30	2000	1934	1916	1872	300
EUR CVS 2010/40	2000	1934	1916	1872	400

Dimensions for EUR CVS 1812 & 2012

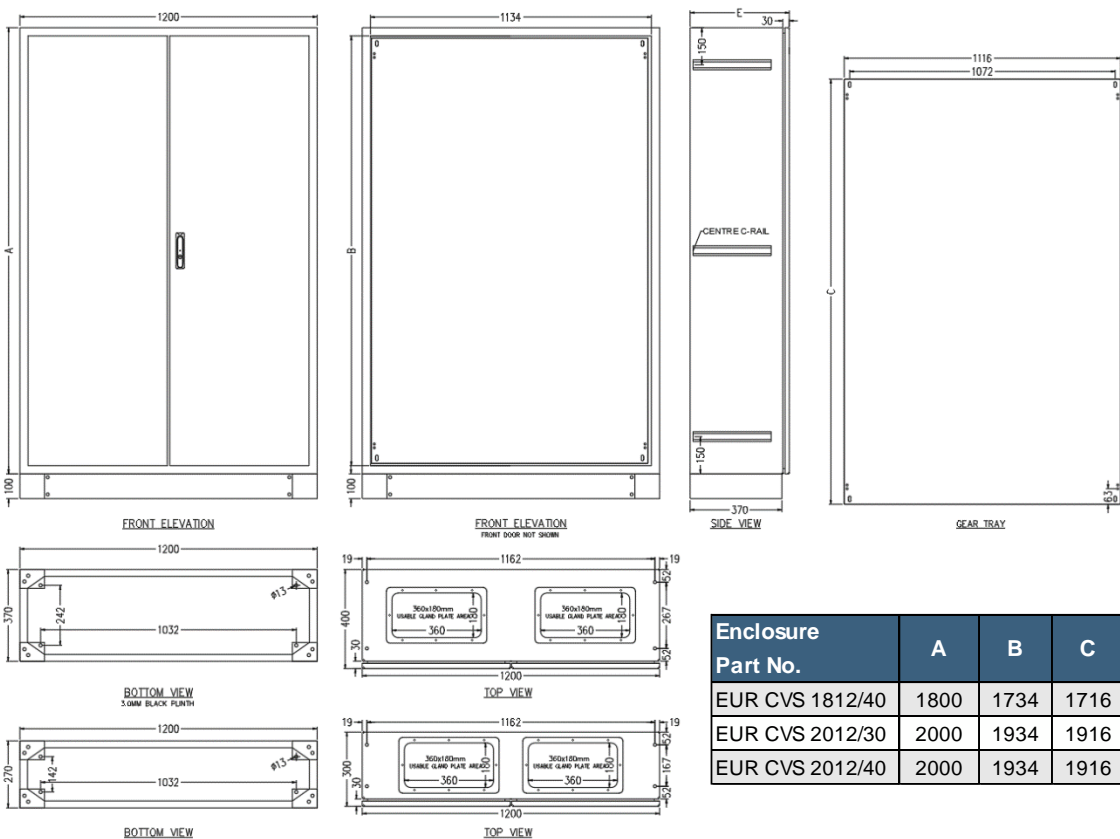

Enclosure Part No.	A	B	C	D	E
EUR CVS 1812/40	1800	1734	1716	1672	400
EUR CVS 2012/30	2000	1934	1916	1872	300
EUR CVS 2012/40	2000	1934	1916	1872	400