



STANDARD INDOOR CONVEX MIRRORS



| Mirror Code | Size | *View Distance | Acrylic Thickness | Depth of Curve | Back | Length of Bracket (A) | Mounting Plate | Mounting Holes |
|----------------|--------|----------------|-------------------|----------------|-------------|-----------------------|----------------|----------------|
| STANDARD RANGE | | | | | | | | |
| 18020J | 300mm | Up to 5m | 2mm | 20mm | 4mm ACM | 250mm | 80x40x5mm | 2 x 7mm |
| 18038J | 450mm | Up to 7m | 2mm | 31mm | 4mm ACM | 250mm | 80x40x5mm | 2 x 7mm |
| 18056J | 600mm | Up to 10m | 2mm | 41mm | 4mm ACM | 360mm | 80x40x5mm | 2 x 7mm |
| 18072J | 760mm | Up to 13m | 2mm | 60mm | 4mm ACM | 360mm | 80x40x5mm | 2 x 7mm |
| 18108J | 900mm | Up to 18m | 2mm | 59mm | 10mm Celuka | 435mm | 200x100x5mm | 4 x 11mm |
| 18112J | 1200mm | Up to 23m | 3mm | 80mm | 10mm Celuka | 435mm | 200x100x5mm | 4 x 11mm |

* View Distance is the combined distance from the observer to the mirror PLUS the distance from the mirror to the area being observed.



SUITABLE USES:

Indoors Only

Wall or Ceiling Mounted
Retail Security
Light Industrial Safety
Hospital and Medical Centres
Office
Child Care Centres and
Schools

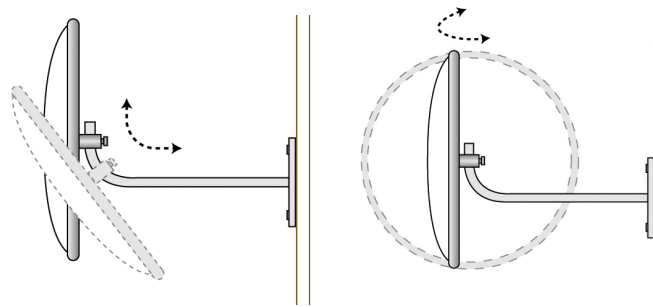
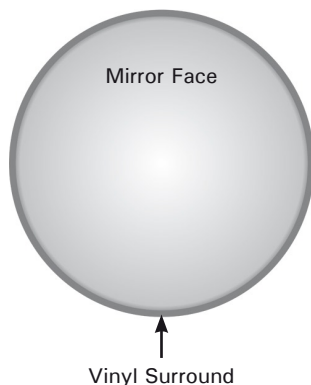


SIZE: 300mm - 760mm

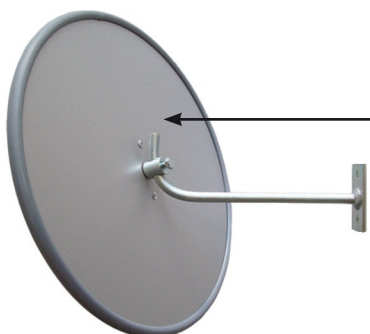

ACM (Aluminium Composite Material) consists of 3 layers. The front and back layers are high strength aluminium alloy sheets. The core is innocuous low density polythene sheet.

SIZE: 900mm - 1200mm

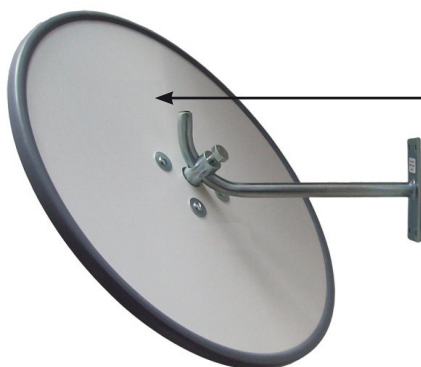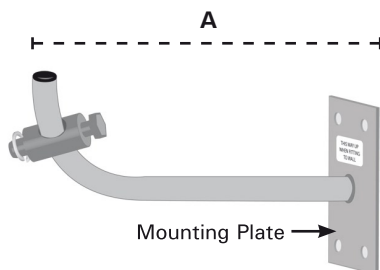

Celuka is a glossy, hard, foam board. Resistant to chemicals and corrosion. Has high impact and structural strength and is suitable for interior applications.